





SUPER DUTY FOUR POST LIFT

The AMGO super duty series is the engineering colossus for the modern industry. With two capacities of 13500KG and 18500KG, these herculean lifts deliver unraveled performance and stability in servicing massive vehicles, such as construction, municipal, and commercial vehicles.



430/430E
440/440E

SPECIFICATIONS

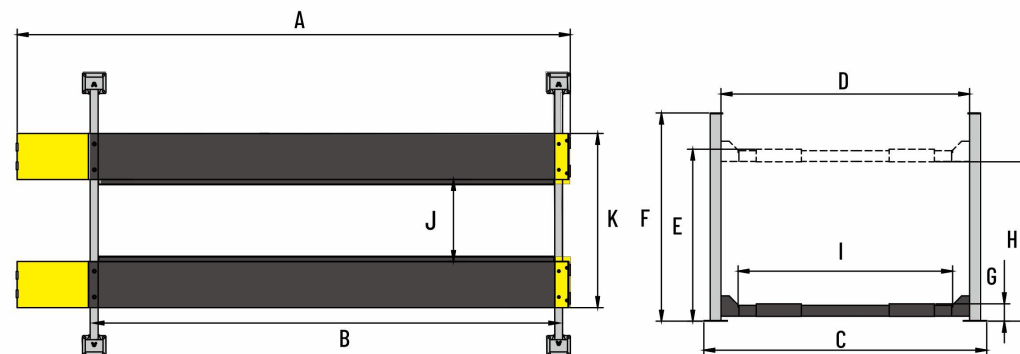

Model	430	430E	440	440E
Style	General service	General service	General service	General service
Lifting capacity	13500kg	13500kg	18000kg	18000kg
Lifting time	116S	116S	160S	160S
Overall Length (Inc. Ramps)	A 7800mm	9300mm	9300mm	10800mm
Runway Length	B 6300mm	7800mm	7800mm	9300mm
Overall Width	C 3748mm	3748mm	3878mm	3878mm
Width Between Columns	D 3302mm	3302mm	3432mm	3432mm
Max. Lifting Height	E 1890mm	1890mm	1894mm	1894mm
Max. Lifting Height to top of runway	1820mm	1820mm	1824mm	1824mm
Overall Height	F 2332mm	2332mm	2332mm	2332mm
Minimum Height	G 240mm	240mm	244mm	244mm
Max. Underneath Height	H 1664mm	1664mm	1664mm	1664mm
Max. Lock Underneath runway	I 1595mm	1595mm	1595mm	1595mm
Drive-Thru Clearance	J 2944mm	2944mm	3074mm	3074mm
Width Between Runway	K 1150mm	1150mm	1168mm	1168mm
	1356mm	1356mm	1374mm	1374mm
Outside Edge of Runways	2370mm	2370mm	2588mm	2588mm
	2576mm	2576mm	2794mm	2794mm
Motor	4.0HP	4.0HP	4.0HP	4.0HP
Gross Weight	2558kg	3118kg	3866kg	4349kg



www.amgolift.com

Super Duty Model



430
(13500KG)

430E
(13500KG)

FEATURES

- Super duty design, with CE certification.;
- Study structure features large platforms to accommodate large vehicles;
- 24V safe electrical operation system;
- Two options of widths between platforms provided to fit various vehicles;
- Integrated non-skid diamond platforms;
- Both auto-activating mechanical lock and air-release safety lock mechanisms;
- Dual safety devices mechanisms: both primary safety locks and cable-slack protection mechanism;
- High quality hydraulic cylinder design and manufactured at high standard.

FOUR POST LIFT

Super Duty Model




440
(18000KG)

440E
(18000KG)



Electric control device with UP, LOCK and DOWN buttons.



Double safety locks provide additional safety.




Oil-water separator and solenoid air valve are installed on the power side column.



Width between platforms offers two options to fit various vehicles



Non-slip diamond platforms come as standard.

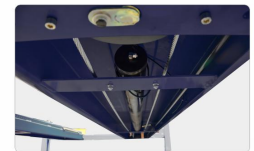

High quality hydraulic cylinder utilizes imported oil seals.



Optional Air Line Kits.
Kits No.40106.



Optional Rolling Jacks
RJ-20A: pneumatic hydraulic
type 9000Kg.



Optional Platform extension kits
add an extra 737mm length to
the platform. Kits No.:43001
for 430/430E