

WEIBONUO Communication Long Reader Range Design

High Gain Outdoor Application

10dBi IP65 902–928MHz Railway RFID Panel Antenna

Model: WBNQ–RFIDL10i6317

Applications

- ❶ 902–928MHz (RFID) Radio Frequency Identification
- ❷ 865–868MHz for ETSI is available on requirement
- ❸ Airports, Hospitals, Warehouse, Door Control
- ❹ Personel control, Production Line and etc..

Features

- ❶ Low Profile with long reader range design
- ❷ 1.3 VSWR with less than 2 axial ratio
- ❸ IP65 Rated
- ❹ Wide range of connector and cable options


Descriptions

WBNQ–RFIDL10i6317 antenna provides reception and transmission of signals in the FCC frequency band. VSWR and axial are excellent and allow the user to achieve the maximum performance for an antenna of this type. The antenna is not only high performance but is possible to provide longer read range. Even in RF–challenging environments, you get longer read ranges and higher levels of performance.

WBNQ–RFIDL10i6317 RFID Antenna is used for mounting on pole to create superior read zones around shelves, doorways and chokepoints, portals, outdoor gates and conveyors, RF–challenging environments.



Antenna Patterns & Dimension

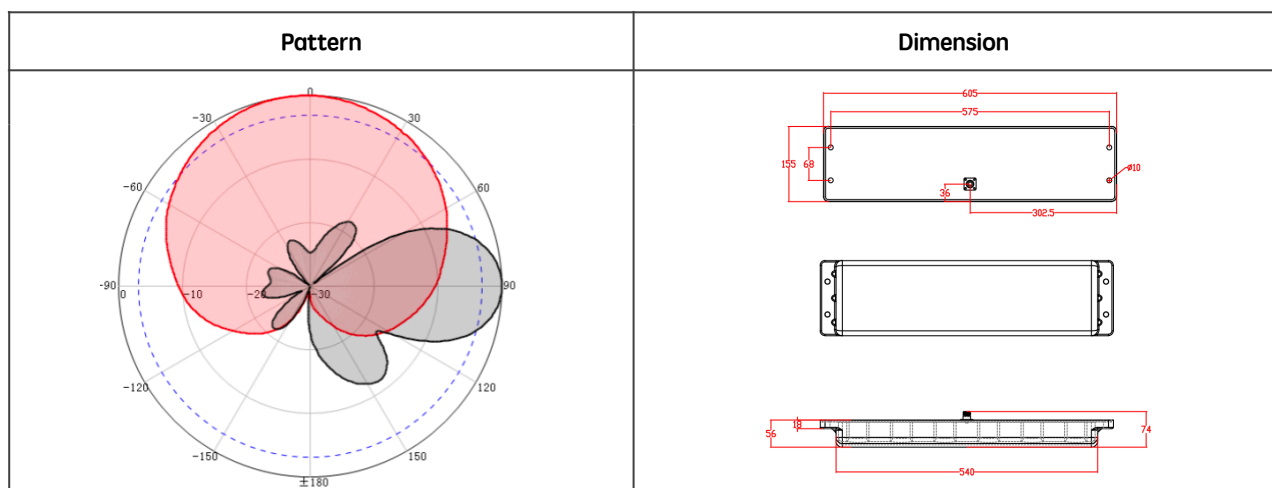

Electrical Specifications

Frequency Range	902-928MHz
Gain (Typ)	10dBi
VSWR (Typ)	≤ 1.3
Axial Ratio	≤2dB
Polarization	Linear
Horizontal Beamwidth	100°
Vertical Beamwidth	30°
Impedance	50 Ohm
Max. Input Power	100 Watts
Lightning Protection	DC Grounded

Mechanical Specifications

Cable Length	Direct Out
Connector	N-Female
Weight	2.46Kg
Dimensions	605 x 155 x 55 mm
Mounting Hardware	/
Radome Material	Fiberglass
Radome Color	Black/White
Effective Wind Area	N/A
Wind-Resistant performance	N/A
Operating Temperature	-20°C to +60°C

* The products and specifications described in this document are subject to change without notice.