

KITO
Beyond Your Imagination




KITO
2CM
AN OUTDOOR FAVORITE



GUANGDONG KITO CERAMICS GROUP CO.,LTD.


Building T6, Smart City Jihua 1st Road, Chancheng Dist., Foshan Guangdong 528000, China
Tel: +86 757 82533869 | Fax: +86 757 82533866 | Email: thankyou@kito.cn

www.kito.cn
www.kitoceramics.com

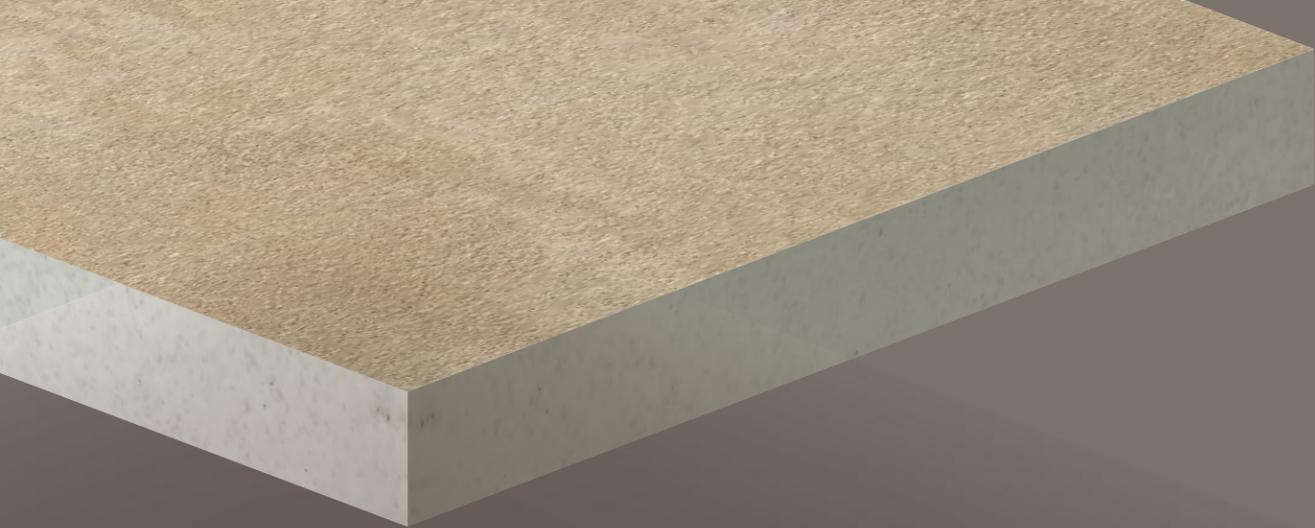


01~02
ABOUT THE BRAND

05~16
9 APPLICATIONS

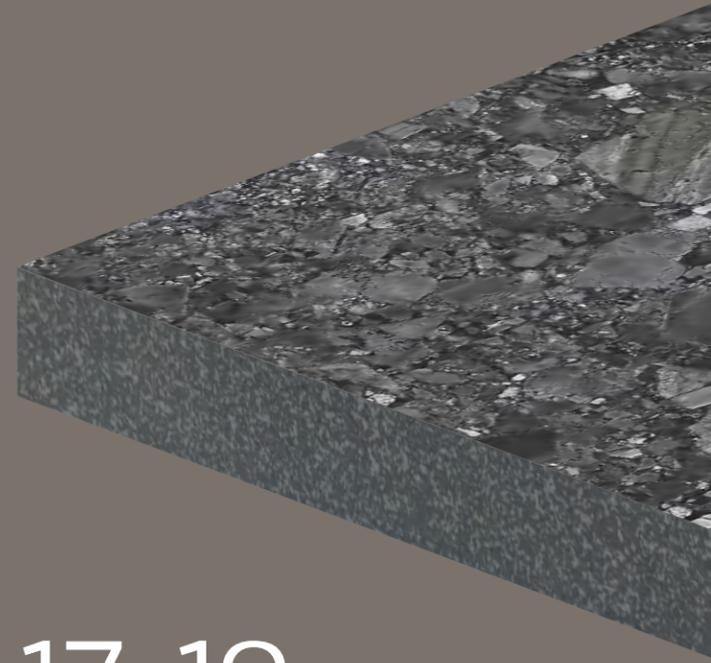

17~19
COLLECTIONS

INDEX

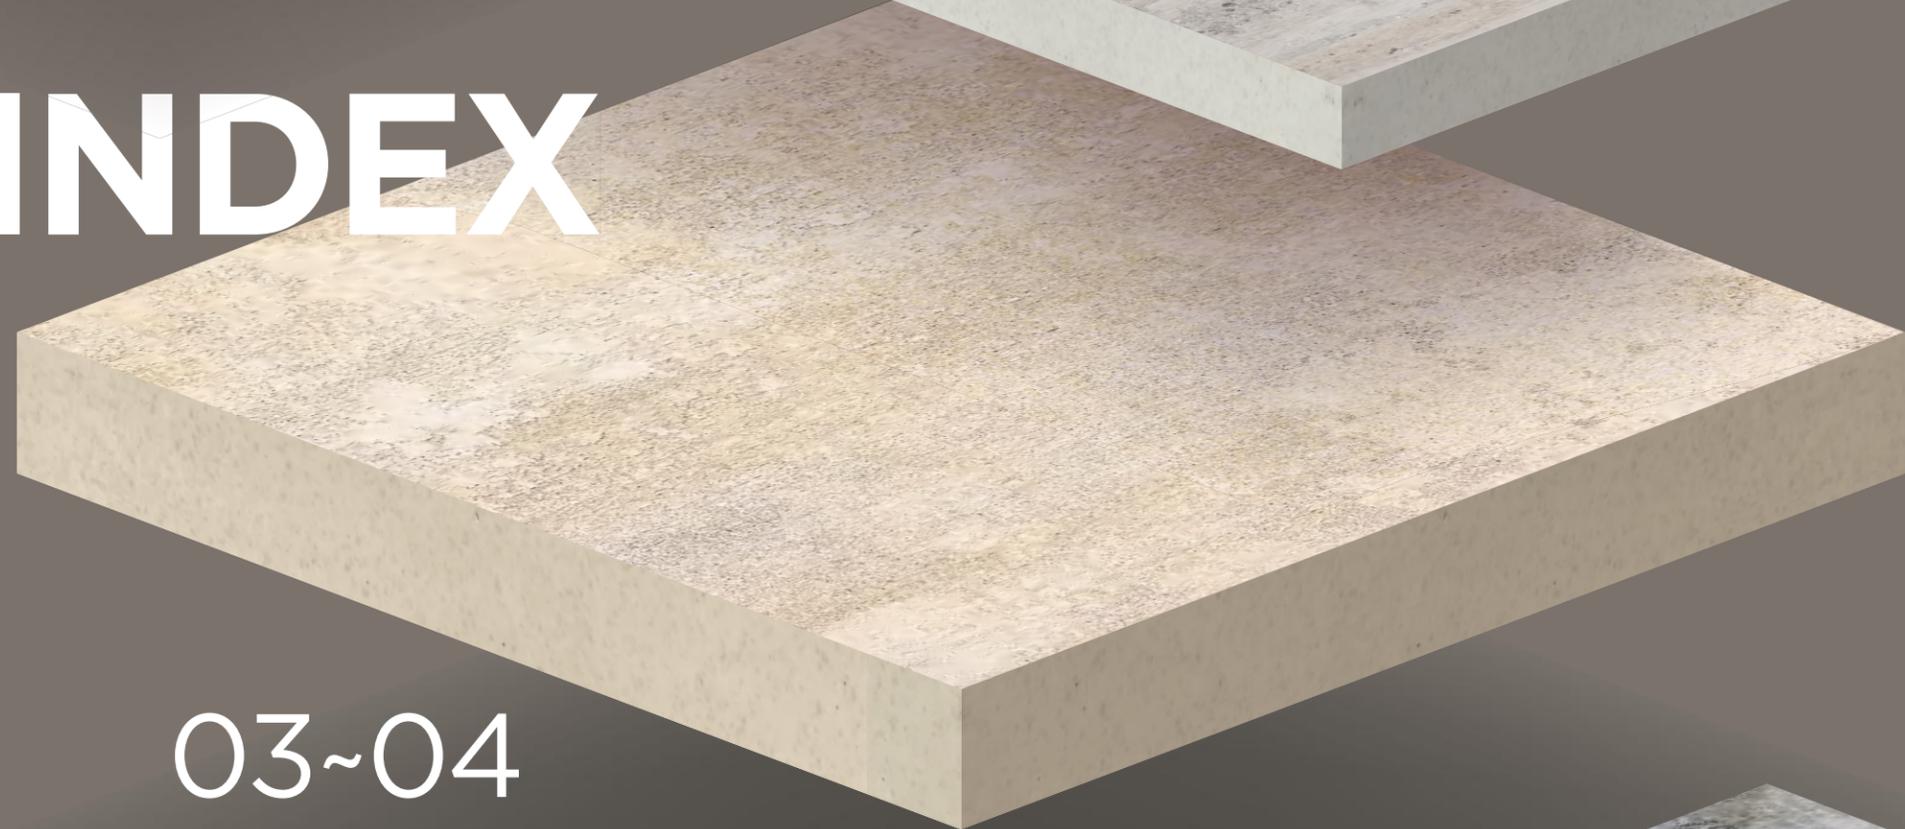

 **2CM**

03~04
OUR DIFFERENTIATION &
4 KEY METHODS OF APPLICATION

20~21
PARAMETER INFO





Why KITO BEYOND YOUR IMAGINATION

LEADING GLAZED TILE MANUFACTURER

KITO is a specialized porcelain tile manufacturer in Foshan, China, with 15 years of experience in producing top-grade glazed porcelain tiles. The annual output is more than 20 million M2

POWERFUL R&D TEAM SUPPORT

More than 300 engineers and experts including Italian designers
314 cases awarded the national patents

RICH PRODUCT RANGE

Size: from 148x398mm (6"x16") to 1600x3200mm (64"x128")
Thickness: 9.2mm to 20mm
Surface: full polished, honed, lappato, matte, satin and rough finish
Techniques: screen printing, rotogravure printing, ink-jet printing

TQC SYSTEM

In accordance with EN14411:2016 standard.



2018 China 500 Most Valuable Brands



Three Star Certification Of Green Building Materials



In Accordance With EN14411:2016 Standard



A recognized world leader in testing inspection and certification services (TIC)



SGS is recognized as the global benchmark for quality and integrity

OUR DIFFERENTIATION

Anti-slip R11

KITO 2CM outdoor porcelain tiles reach R11 which provides traction close to that of natural stone. R12 also available for customization



High Breaking Strength

KITO 2CM outdoor porcelain tiles reach a breaking strength of 10,200N. Similar natural stone would be 4cm thick to have the same breaking strength.



2CM




Full Body

Advanced technologies such as full body tiling, in addition to high pressure and high temperature treatment, are adopted in the manufacturing process. As a result, 2CM outdoor porcelain tiles has high breaking strength, low water absorption ($\leq 0.5\%$) and class 3 abrasion resistance.

Natural Stone Texture

KITO 2CM outdoor porcelain tiles are full 20mm in thickness, which provides an elegant natural stone texture.



4 KEY METHODS OF APPLICATION

EASY TO INSTALL AND MAINTAIN

Laid on gravel



Laid on grass



Laid on mortar




Laid on pedestal





9 APPLICATIONS


KITO 2CM tiles are suitable for various outdoor locations, including swimming pool, balconies and so on.




ON
GRASS




ON
GRAVEL




FRONT &
BACK YARD




OUTDOOR
APPLICATION




SWIMMING
POOL




TRAFFIC
SITE



GARAGE &
PARKING




EXTERNAL
FACADES



STAIRCASE
STEPS

ON GRASS

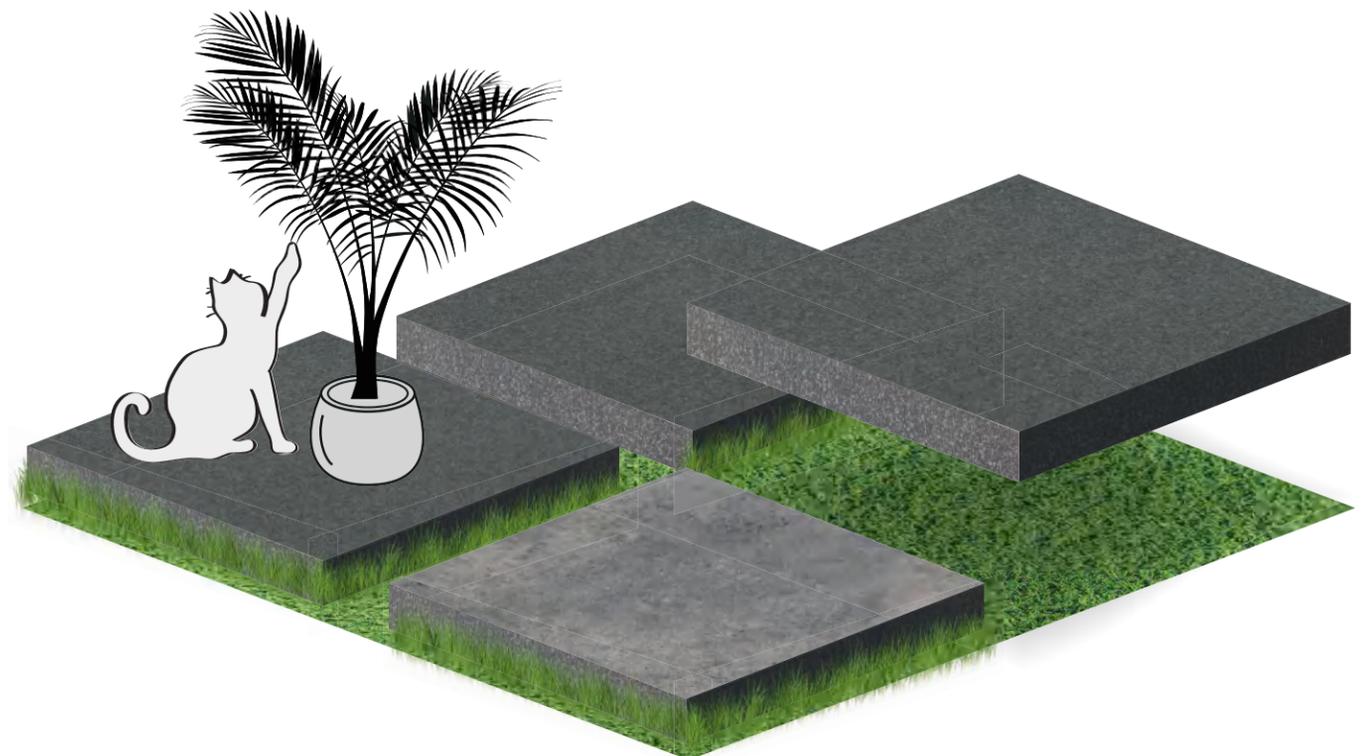

Basalt Stone

K0606529DAZ
600×600×20mm




Cement

K0606419DAZ
600×600×20mm



Ales

K0603517DAZ
600×600×20mm

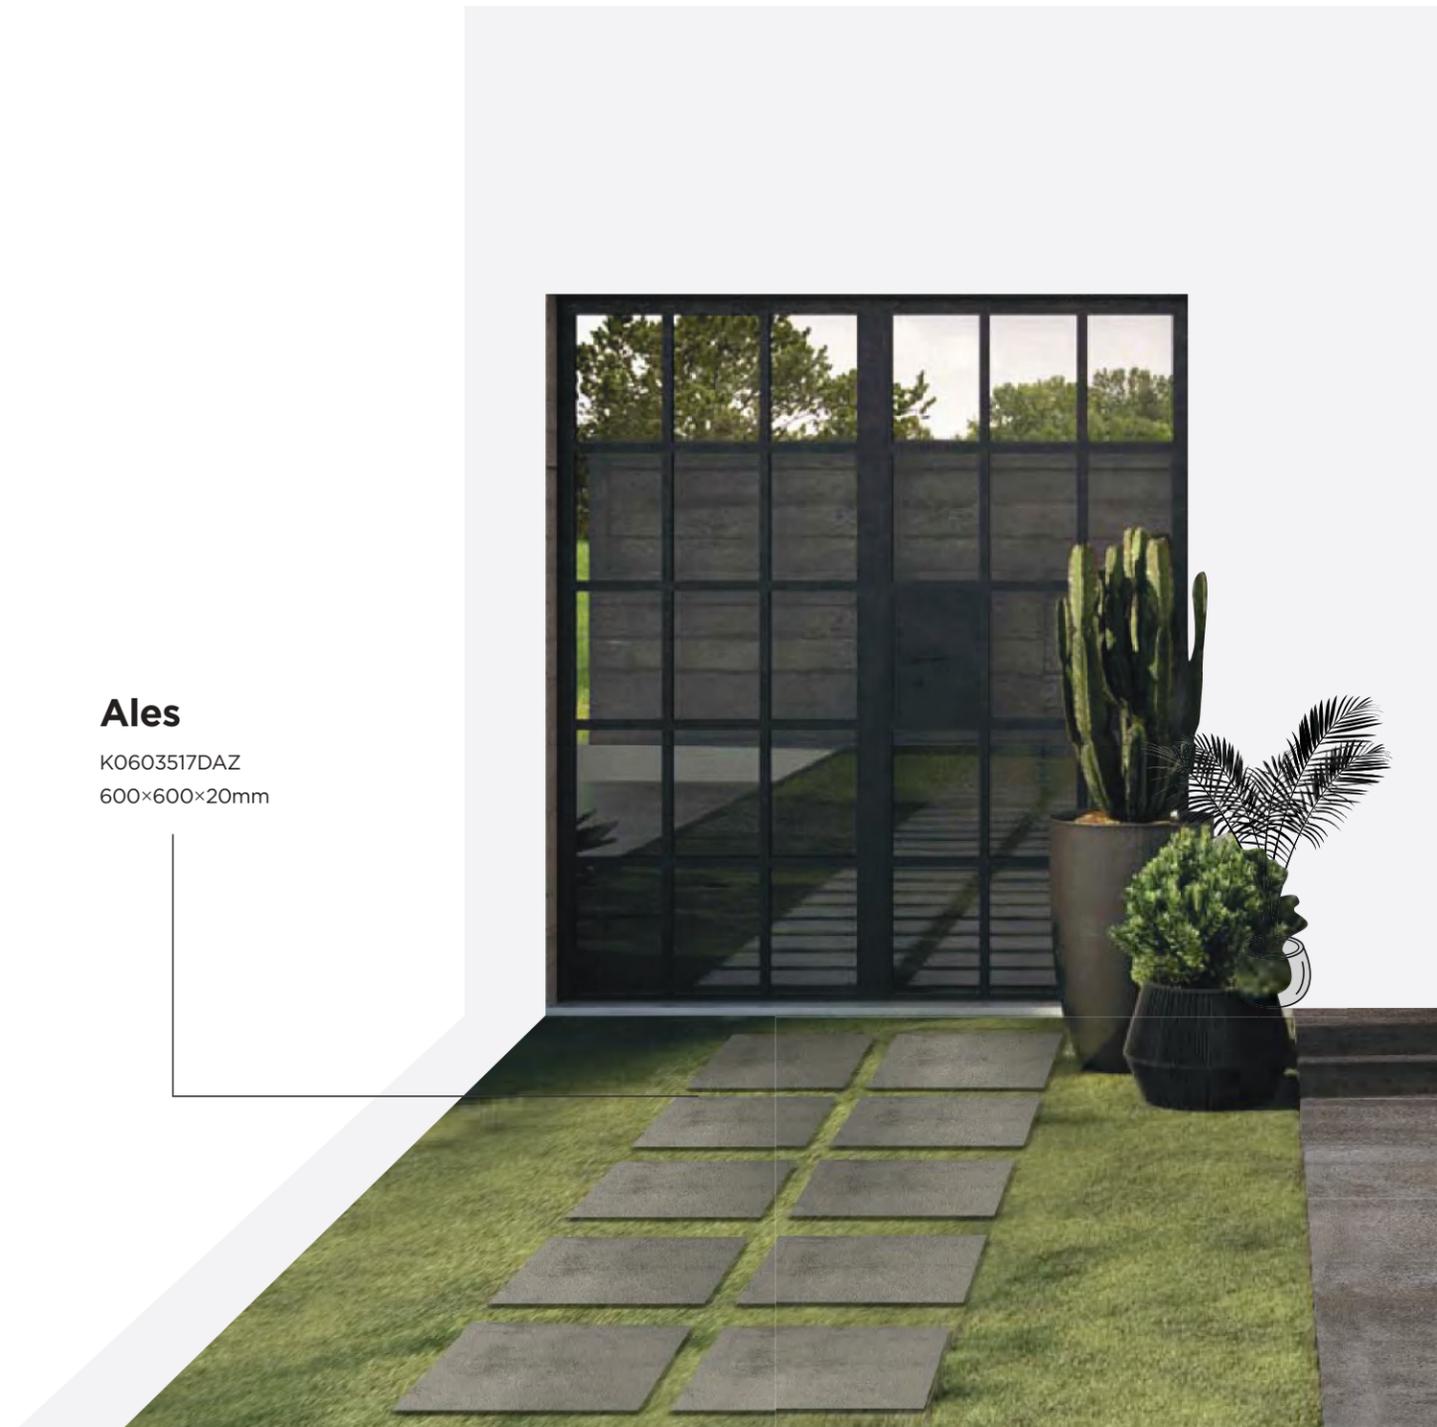

ON GRAVEL



Ales
K0603517DAZ
600×600×20mm

FRONT & BACK YARD



Cassero
K0603523DAZ
600×600×20mm



Cassero
K0603520DAZ
600×600×20mm


OUTDOOR



Pietra Carsica

K0603388DAZ
600×600×20mm

SWIMMING POOL

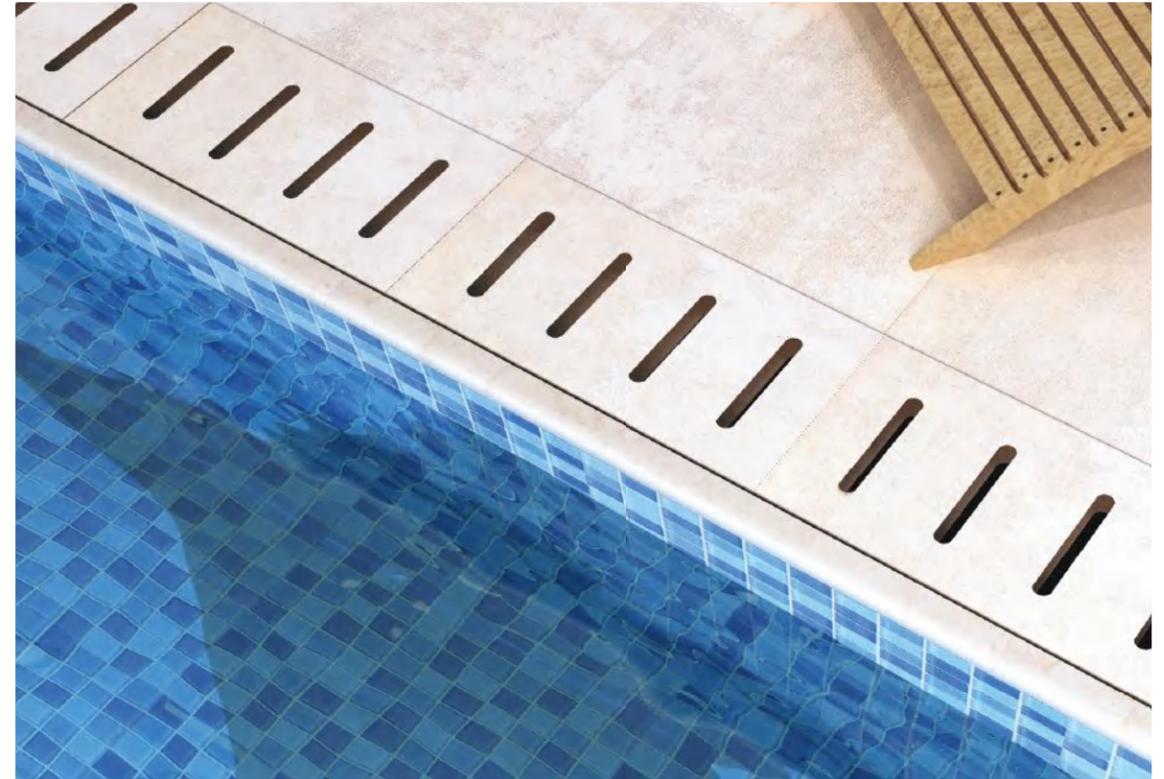

Cement

K0603704DAZ
600×600×20mm




TRAFFIC SITE



Ales

K0603525DAZ
600×600×20mm

GARAGE & PARKING

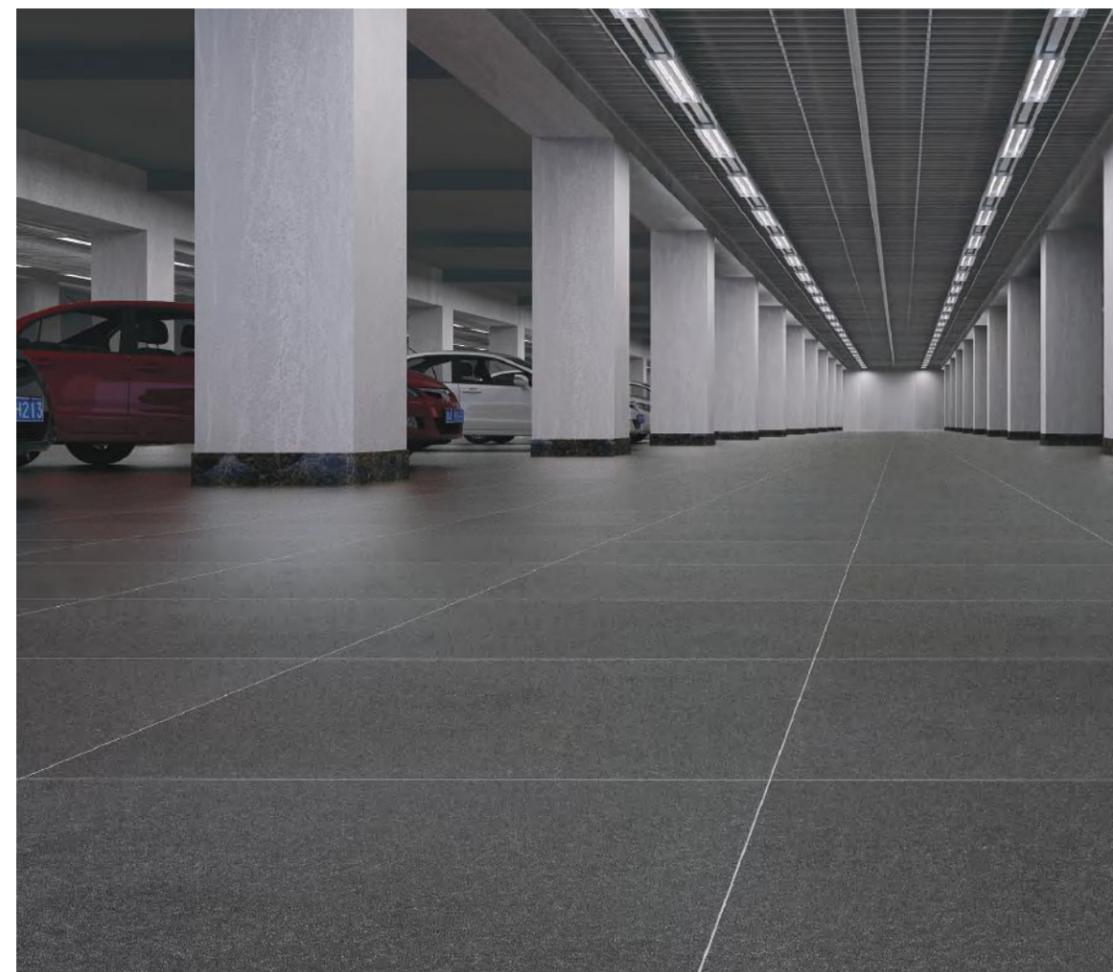


Basalt Stone

K0606033DAZ
600×600×20mm



EXTERNAL FACADES

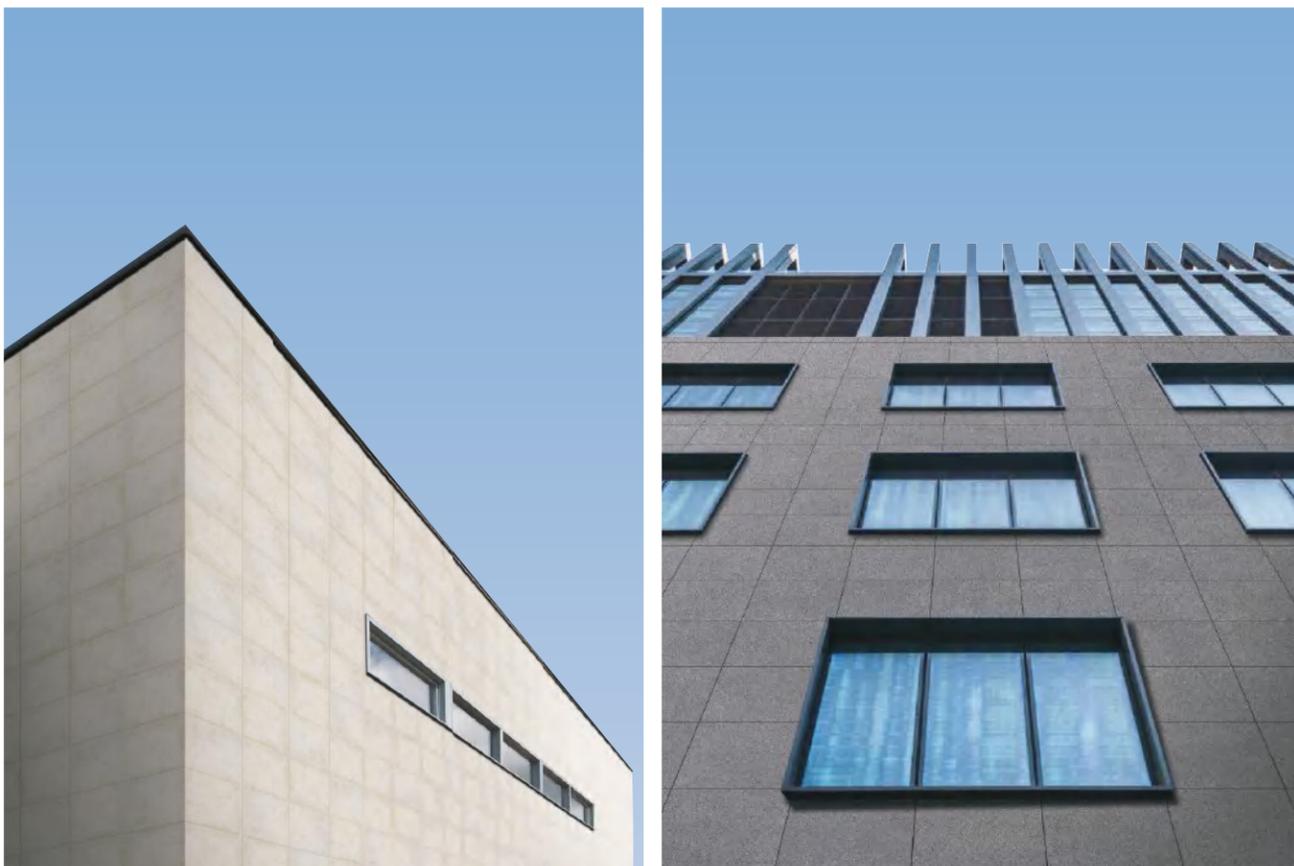

Ales


K0603525DAZ
600×600×20mm



Basalt Stone

K0606503DAZ
600×600×20mm

STAIRCASE STEPS

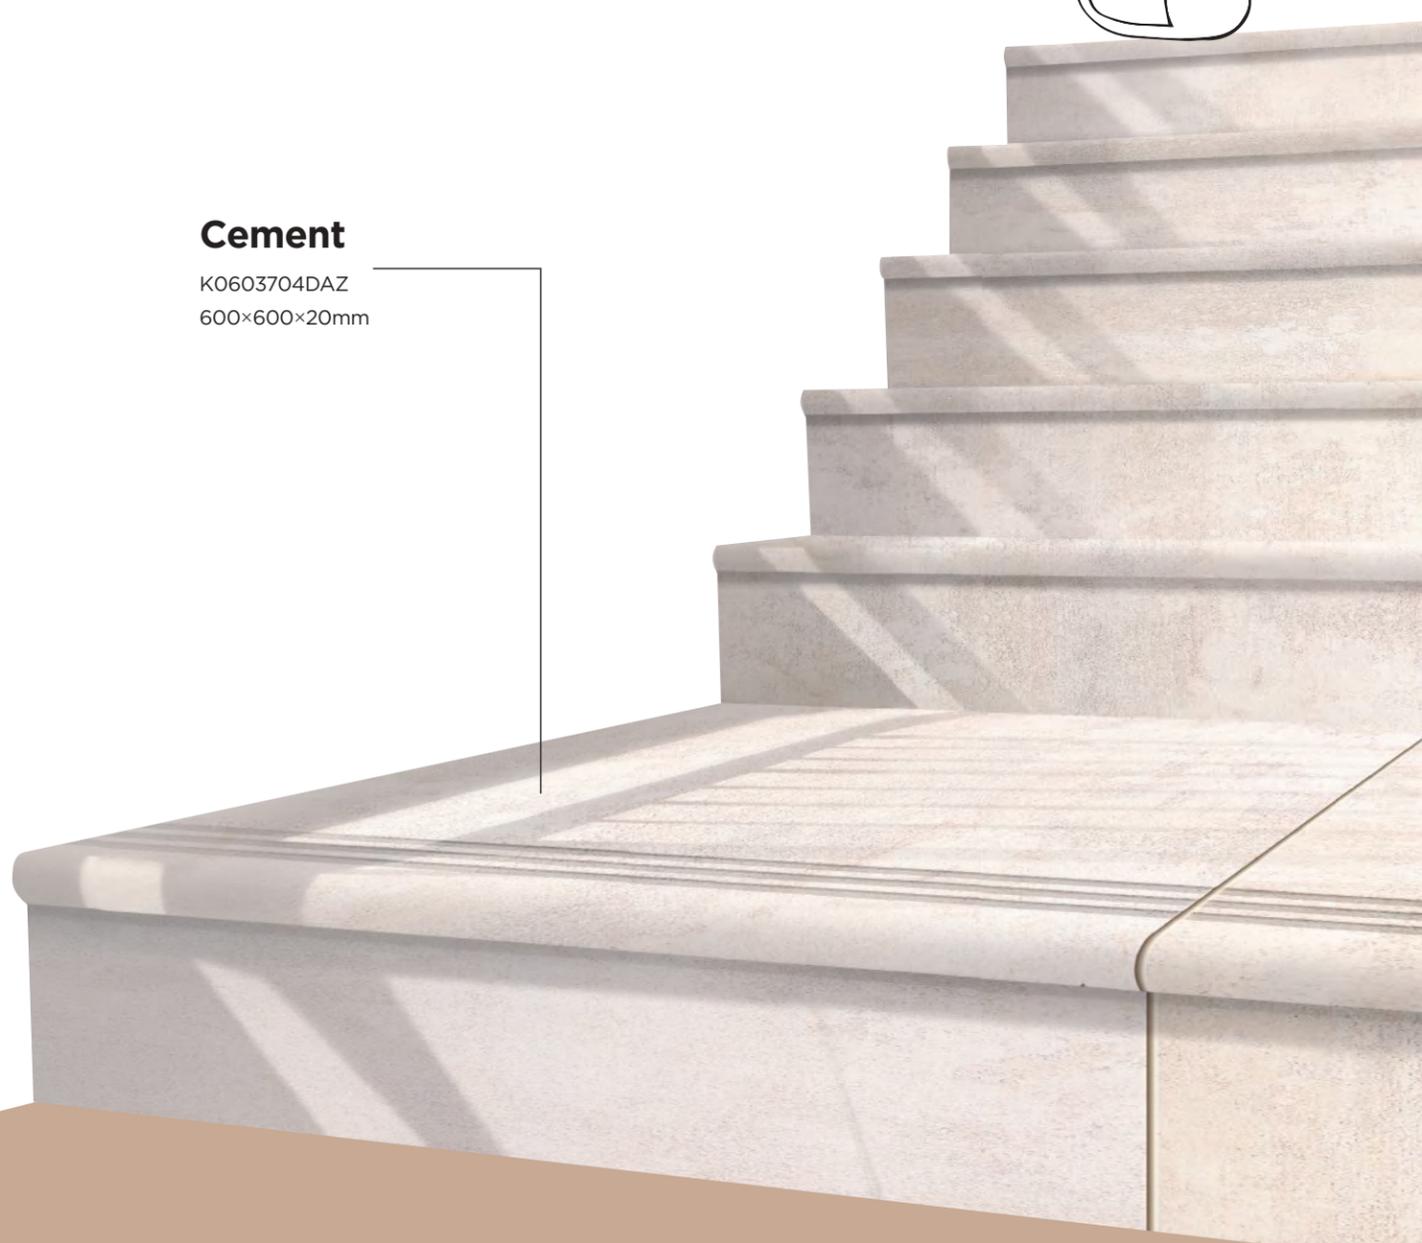

Cement

K0603704DAZ
600×600×20mm

COLLECTIONS

Ales / Cassero/ Trani available size: 1200×600×10mm 600×600×10mm

Ales

600×600×20mm



K0603516DAZ  10
 K0603517DAZ  10
 K0603518DAZ  10
 K0603519DAZ  10
 K0603525DAZ  10

600×1200×20mm



K1263516DAZ
 K1263517DAZ

Cassero

600×600×20mm



K0603520DAZ  12
 K0603522DAZ  12
 K0603523DAZ  12

Trani

600×600×20mm



K00608036ZAO
 K00608037ZAO
 K00608039ZAO

Basalt Stone

600×600×20mm



K0606033DAZ  1
 K0606529DAZ  1
 K0606503DAZ  1

600×1200×20mm



K1266033DAZ
 K1266503DAZ

Cement

600×1200×20mm

600×600×20mm



K0126704ZAO
 K0603704DAZ  3
 K0606419DAZ  7

Limestone

600×600×20mm



K00606919ZAO  7
 K00606906ZAO  7
 K00606893ZAO  7
 K00606894ZAO  7

Terrazzo

600×600×20mm



K0606801DAZ
 4

Sand Stone

600×600×20mm



K0606527DAZ
 5



K0606528DAZ
 1

Slate Stone

600×600×20mm



K0606418DAZ
 1

Pietra Carsica

600×600×20mm



K0603388DAZ
 20

Cararra


600×600×20mm




K0606542DAZ

ACCESSORIES


Drop Face



Bullnose





Sink Tile




Steps

Stairs tiles are available:
 Round edge step + riser / 45° chamfering step + riser

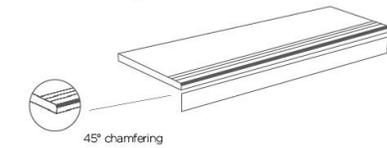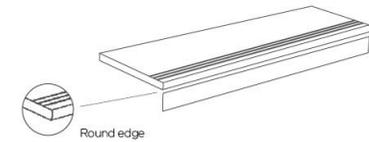

Plastic Pedestal





2CM

TECHNICAL DATA

 Thickness	20mm
 Water Absorption	Less than 0.5%
 Breaking Strength	$\geq 10200\text{N}$
 Modulus of Rupture	Minimum $\geq 35\text{N/mm}^2$
 Static Coefficient of Friction	Dry: 0.87, Wet: 0.73
 DCOF	0.52
 PEI	Class 4
 Slipperiness	R11

PARAMETER INFO

PACKING INFO

 Ctn size	600×600×20mm	1200×600×20mm
 Pcs/Ctn	2	1
 M ² /Ctn	0.72	0.72
 Kg/Ctn	34	34

 Pallet size	1.1×1.1m	1.1×1.1m
 Ctn/Pal	40	31
 M ² /Pal	28.8	22.32
 Kg/Pal	1360	1054

 Ctn/Cont	800	775
 Pcs/Cont	576	558
 Kg/Cont	27000	26350