

**KITO**  
Beyond Your Imagination



GUANGDONG KITO CERAMICS GROUP CO.,LTD.

Building T6, Smart City Jihua 1st Road, Chancheng Dist., Foshan Guangdong 528000, China  
Tel: +86 757 82533869 | Fax: +86 757 82533866 | Email: [thankyou@kito.cn](mailto:thankyou@kito.cn)

[www.kito.cn](http://www.kito.cn)  
[www.kitoceramics.com](http://www.kitoceramics.com)

**KITO**  
**2CM**  
AN OUTDOOR FAVORITE



**KITO**  
Beyond Your Imagination





01~02  
ABOUT THE BRAND

05~16  
9 APPLICATIONS

17~18  
PROJECT CASES

19~26  
COLLECTIONS

27  
PARAMETER INFO

28  
ACCESSORIES

29  
PACKING INFO

# INDEX

03~04  
OUR DIFFERENTIATION &  
4 KEY METHODS OF APPLICATION

 **2CM**



# Why KITO BEYOND YOUR IMAGINATION

## LEADING GLAZED TILE MANUFACTURER

KITO is a specialized porcelain tile manufacturer in Foshan, China, with 20 years of experience in producing top-grade glazed porcelain-tiles. The annual output is more than 20 million M2.

## POWERFUL R&D TEAM SUPPORT

More than 300 engineers and experts including Italian designers 288 cases awarded the national patents.

## RICH PRODUCT RANGE

Size: from 600x300mm to 1600x3200mm  
Thickness: 6 mm to 20mm  
Surface: full polished, honed, lappato, matte, sugar effect, stone touch surface and rough  
Techniques: ink-jet printing

## TQC SYSTEM

In accordance with EN14411:2016 standard.



SGS is recognized as the global benchmark for quality and integrity



In Accordance With EN14411:2016 Standard



LRV



A recognized world leader in testing inspection and certification services (TIC)



Three Star Certification Of Green Building Materials



UK Conformity Assessment



# OUR DIFFERENTIATION

**Anti-slip R11 & P5**

KITO 2CM outdoor porcelain tiles reach R11 which provides traction close to that of natural stone. R12 also available for customization.

**High Breaking Strength**


KITO 2CM outdoor porcelain tiles reach a breaking strength of 10,200N. Similar natural stone would be 4cm thick to have the same breaking strength.

**Full Body**

Advanced technologies such as full body tiling, in addition to high pressure and high temperature treatment, are adopted in the manufacturing process. As a result, 2CM outdoor porcelain tiles has high breaking strength, low water absorption ( $\leq 0.5\%$ ) and class 3 abrasion resistance.

**Natural Stone Texture**


KITO 2CM outdoor porcelain tiles are full 20mm in thickness, which provides an elegant natural stone texture.

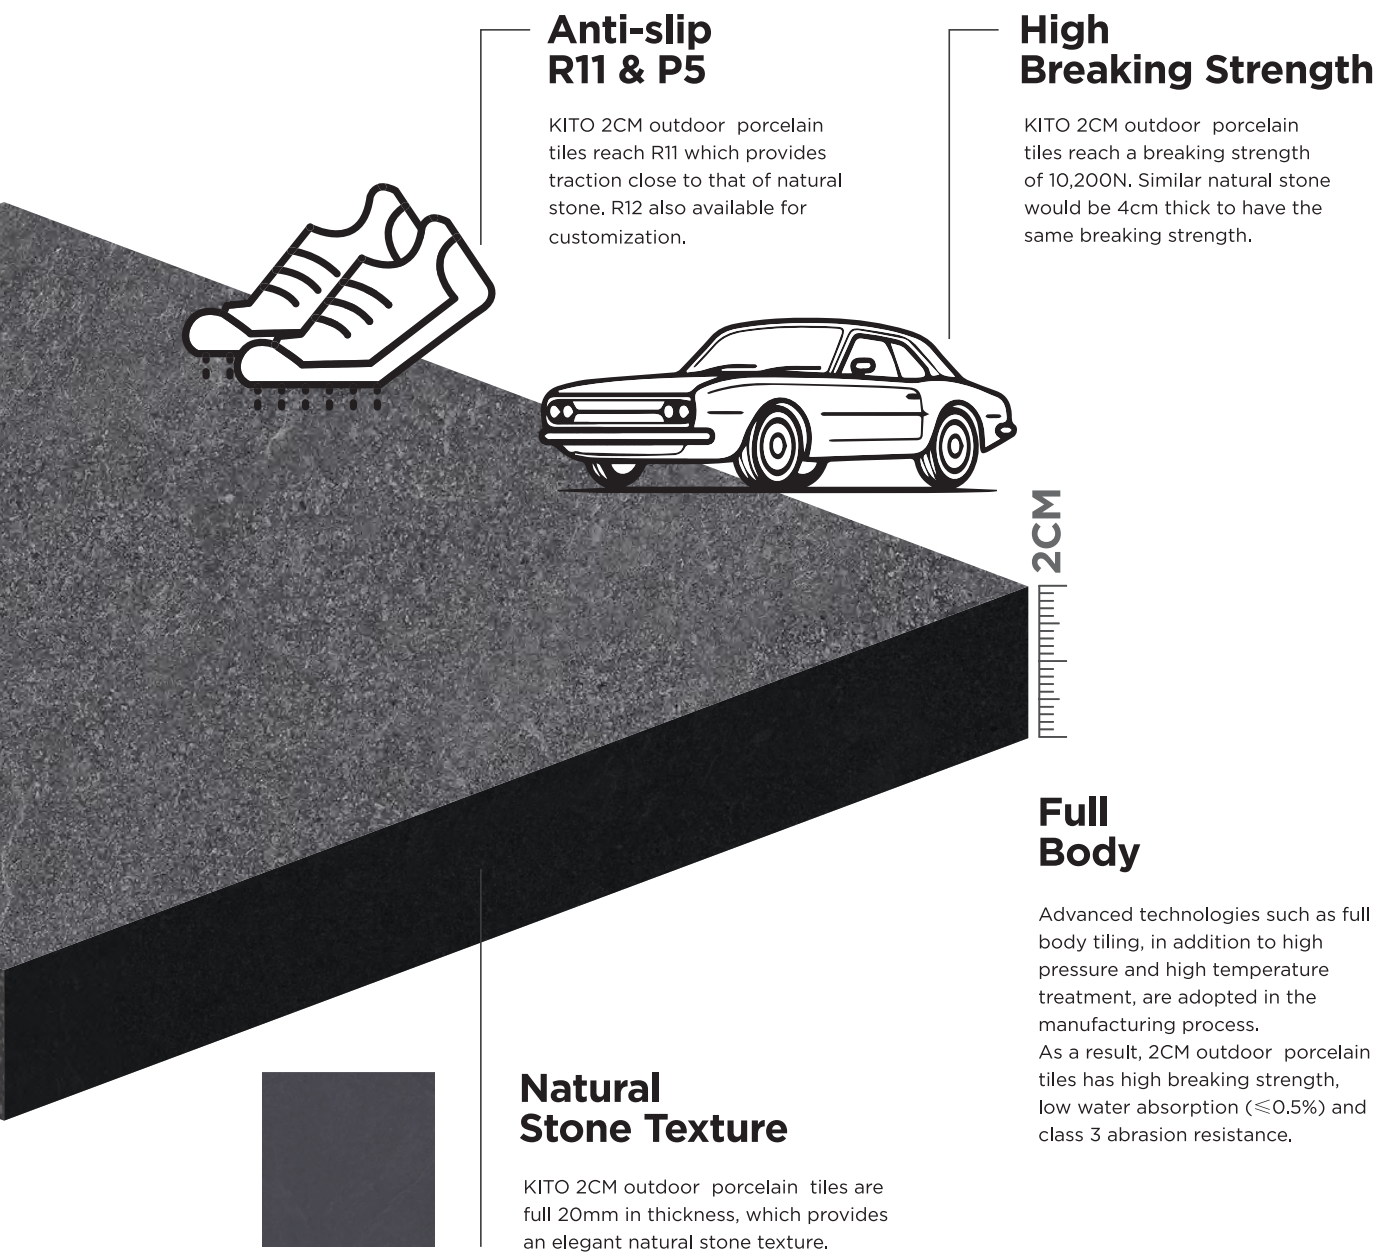


# 4 KEY METHODS OF APPLICATION

EASY TO INSTALL AND MAINTAIN


*Laid on gravel*




*Laid on grass*




*Laid on mortar*

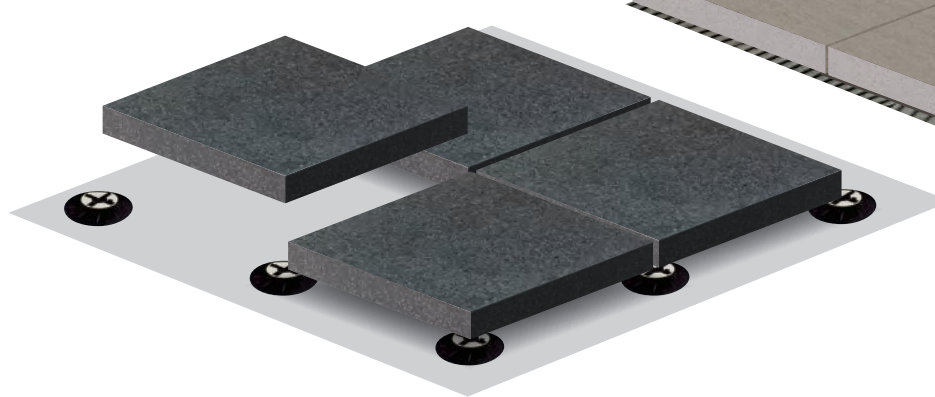

*Laid on pedestal*

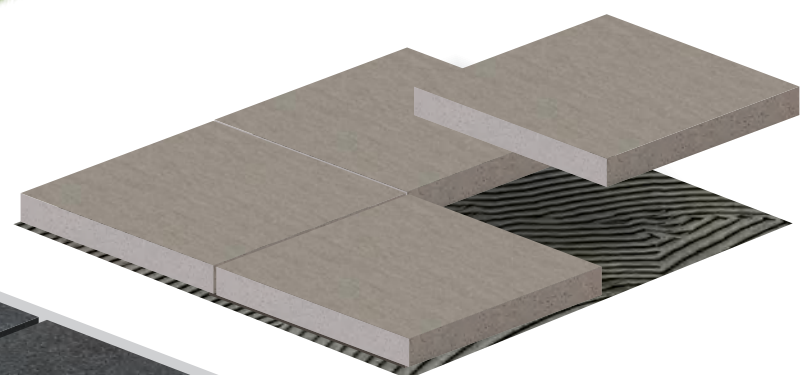



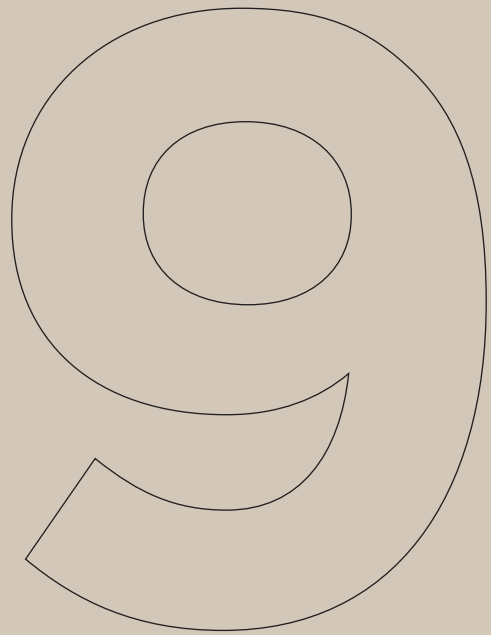

# 9 APPLICATIONS

KITO 2CM tiles are suitable for various outdoor locations, including swimming pool, balconies and so on.



ON GRASS



ON GRAVEL



FRONT & BACK YARD



GARDEN



SWIMMING POOL




TRAFFIC SITE



GARAGE & PARKING



EXTERNAL FACADES



STAIRCASE STEPS






# ON GRASS

The 2CM porcelain tile can be easily positioned on grass, removed and repositioned, allowing maximum flexibility in creating different configurations.

Easy to install and remove;


Quick water drainage keeping the ground unchanged;

Ideal to create continuity between indoor and outdoor flooring.

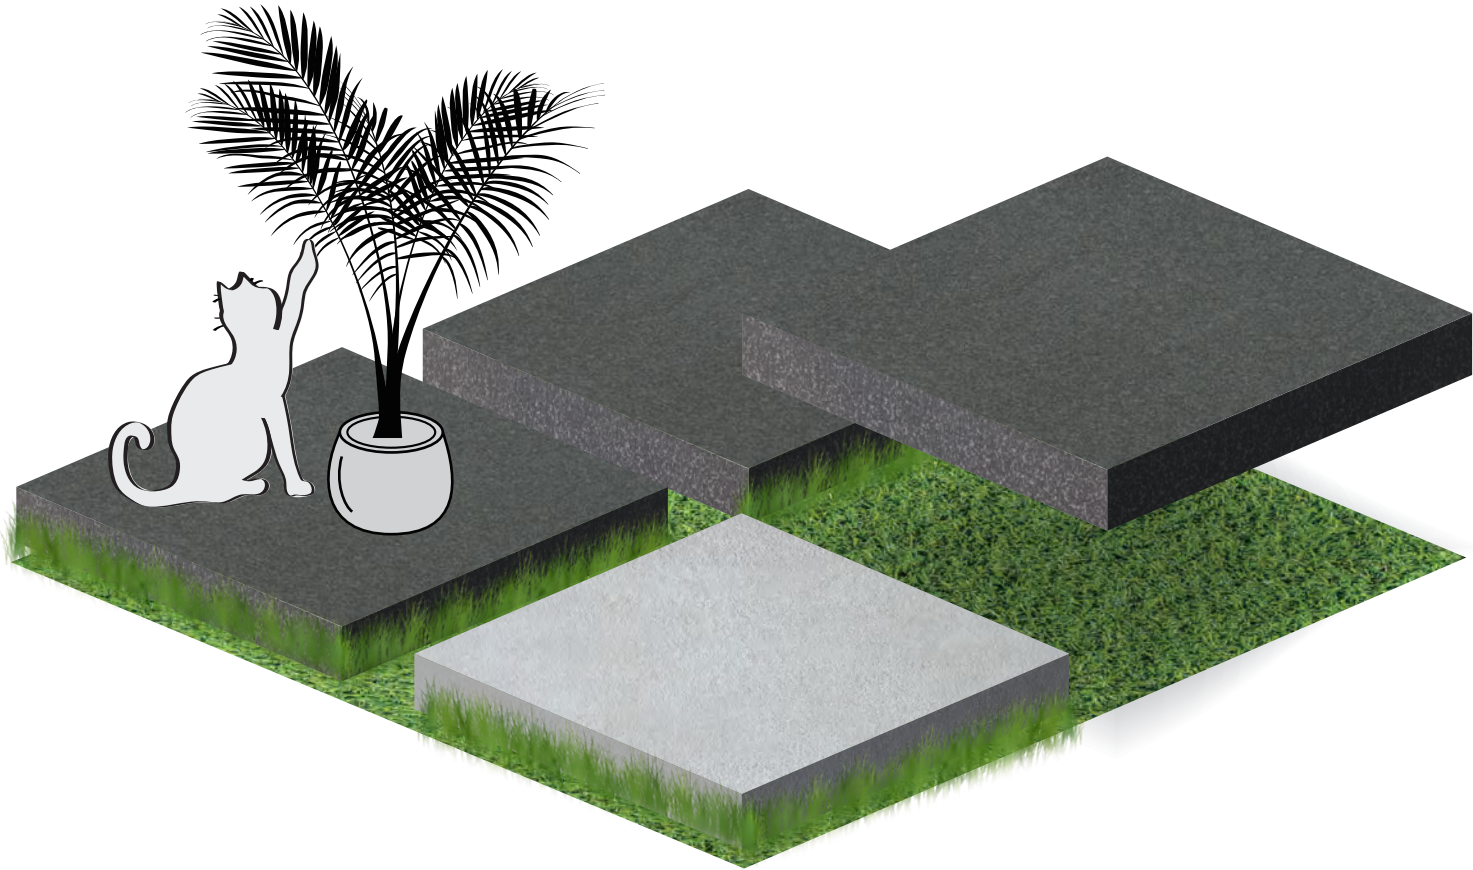


## Basalt Stone

K0606529DAZ  
600×600×20mm

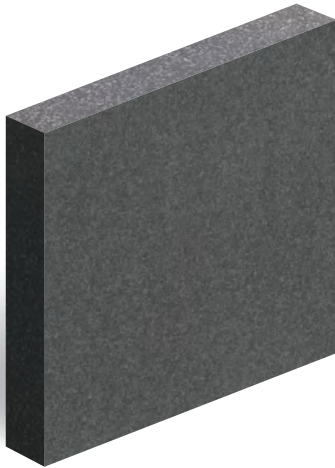

## Ales

K0603525DAZ  
600×600×20mm

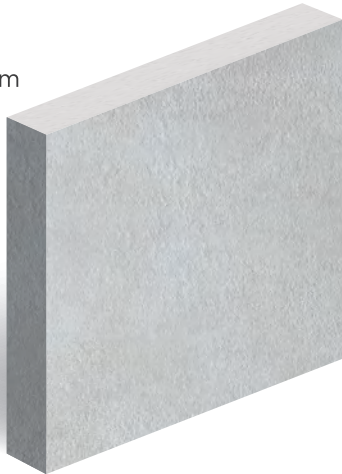


# ON GRAVEL



## Ales

K0603517DAZ  
600×600×20mm

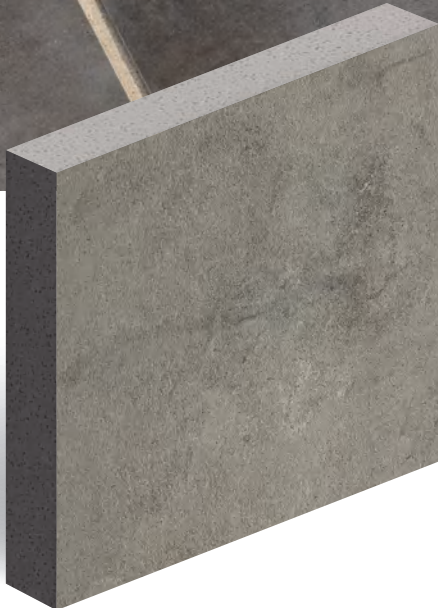



# FRONT YARD





**Ivory Wood**  
K00606979ZAO  
600×600×20mm



**Sterling**  
K00606100ZAO  
600×600×20mm

# BACK YARD

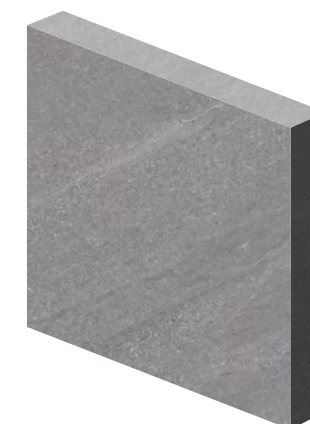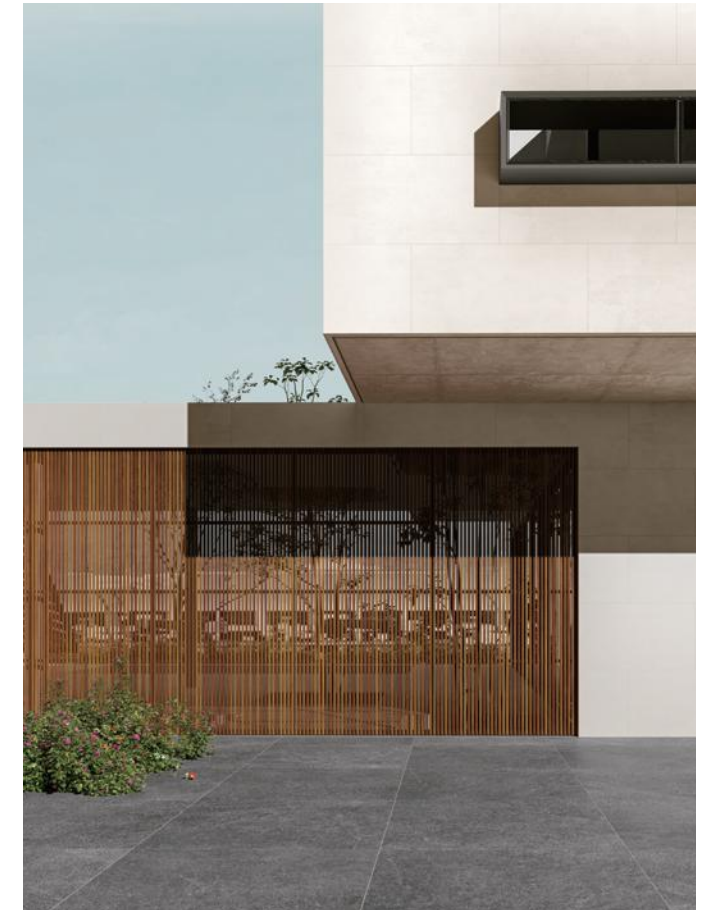

**Valles**  
K00606187ZAO  
600×600×20mm



**Trani**  
K00608039ZAO  
600×600×20mm



# GARDEN



**Sterling**

K00606098ZAO  
600×600×20mm

# SWIMMING POOL



**Cement**

K0603704DAZ  
600×600×20mm






# TRAFFIC SITE



**Ales**  
K0603525DAZ  
600×600×20mm


# GARAGE & PARKING

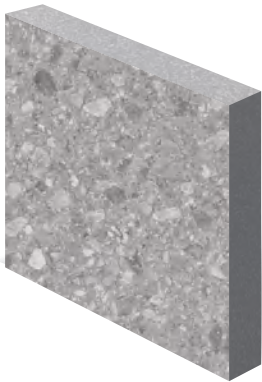

**Terrazzo**  
K00606977ZAO  
600×600×20mm



# EXTERNAL FACADES

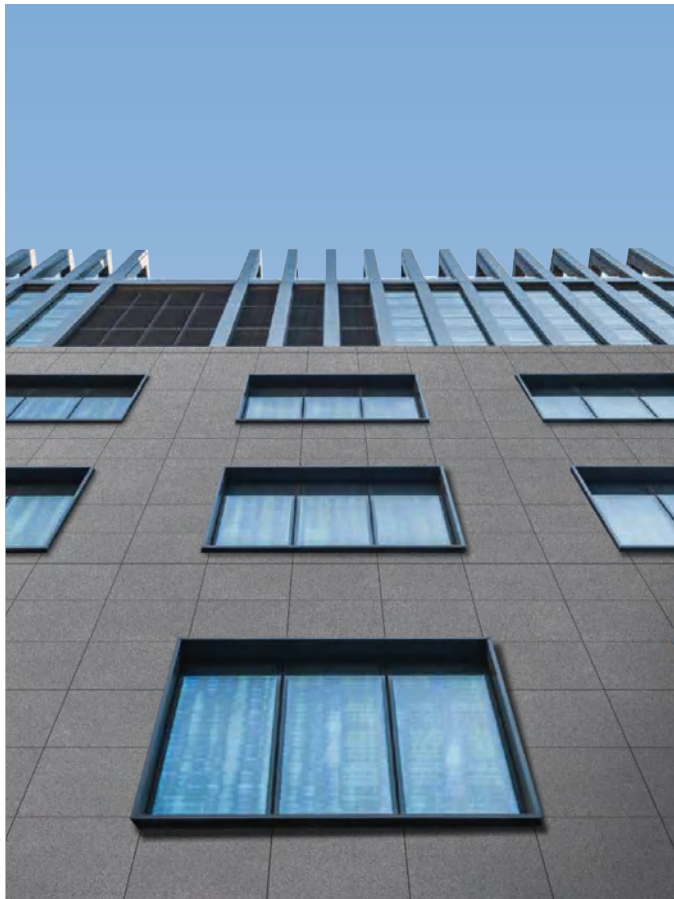

# STAIRCASE STEPS




## Cement

\*K01263704ZAO  
600×1200×20mm



## Ales

\*K1263525DAZ  
600×1200×20mm

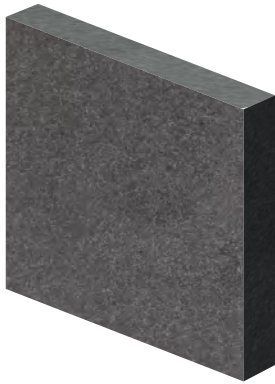


## Basalt Stone

K0606033DAZ  
600×600×20mm



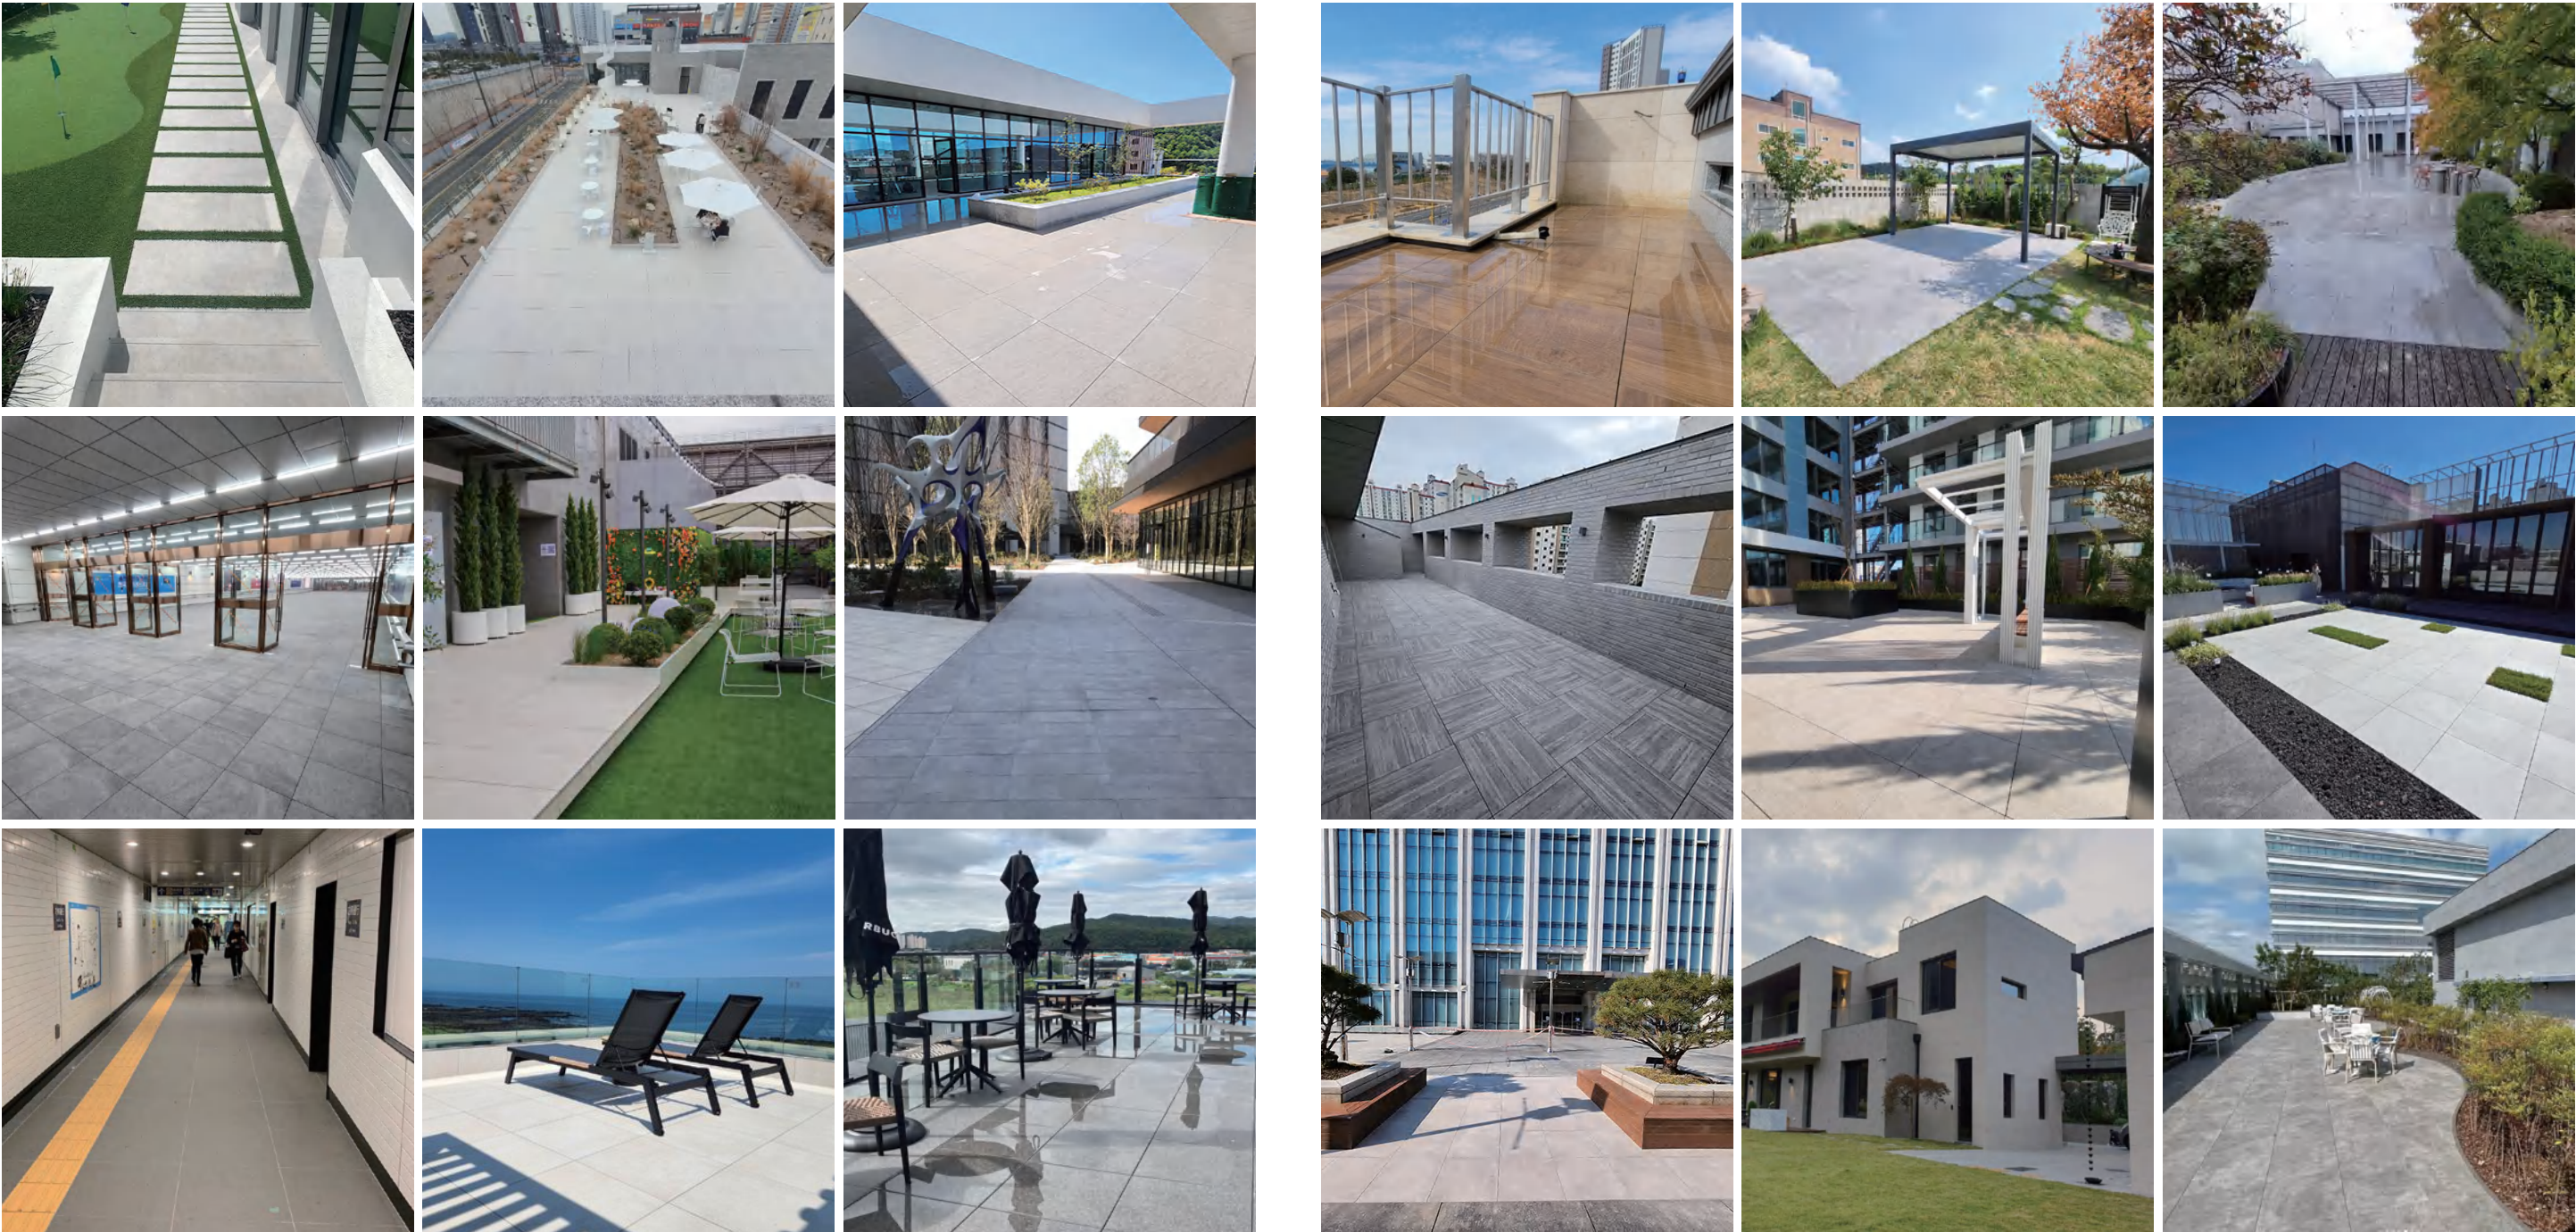

# APPLICATION CASES







# COLLECTIONS


 10mm Indoor

 20mm Outdoor

  
600×600

  
600×1200


## Ales

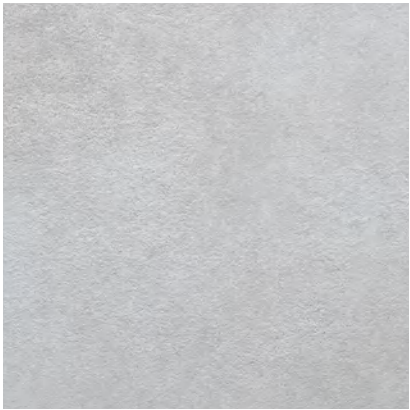

K0603525DAZ  
600×600×20mm  


\*K1263525DAZ  
600×1200×20mm  




K0603516DAZ  
600×600×20mm  


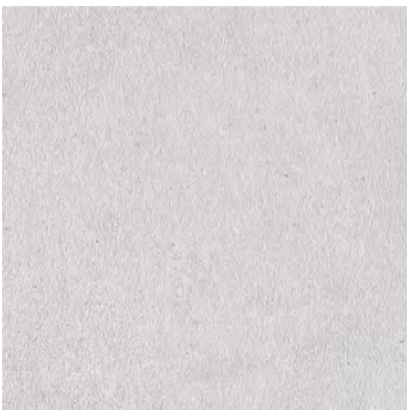
\*K1263516DAZ  
600×1200×20mm  






K0603517DAZ  
600×600×20mm  



\*K1263517DAZ  
600×1200×20mm  


## Trani



K00608036ZAO  
600×600×20mm  


\*K01268036ZAO  
600×1200×20mm  

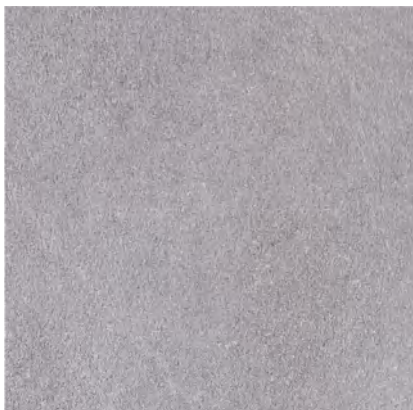


K00608037ZAO  
600×600×20mm  


\*K01268037ZAO  
600×1200×20mm  





K00608039ZAO  
600×600×20mm  


\*K01268039ZAO  
600×1200×20mm  





K0603518DAZ  
600×600×20mm  




K0603519DAZ  
600×600×20mm  


\*K1263518DAZ  
600×1200×20mm  




K00608040ZAO  
600×600×20mm  


\*K01268040ZAO  
600×1200×20mm  




# Valles



K00606184ZAO  
600×600×20mm



K00606185ZAO  
600×600×20mm



K00606186ZAO  
600×600×20mm



K00606187ZAO  
600×600×20mm



K00606188ZAO  
600×600×20mm



# Dulcet



K00606101ZAO  
600×600×20mm



K00606102ZAO  
600×600×20mm



K00606103ZAO  
600×600×20mm



# Limenza



\*K00606215ZAO  
600×600×20mm



\*K00606216ZAO  
600×600×20mm




\*K00606217ZAO  
600×600×20mm





# Sterling

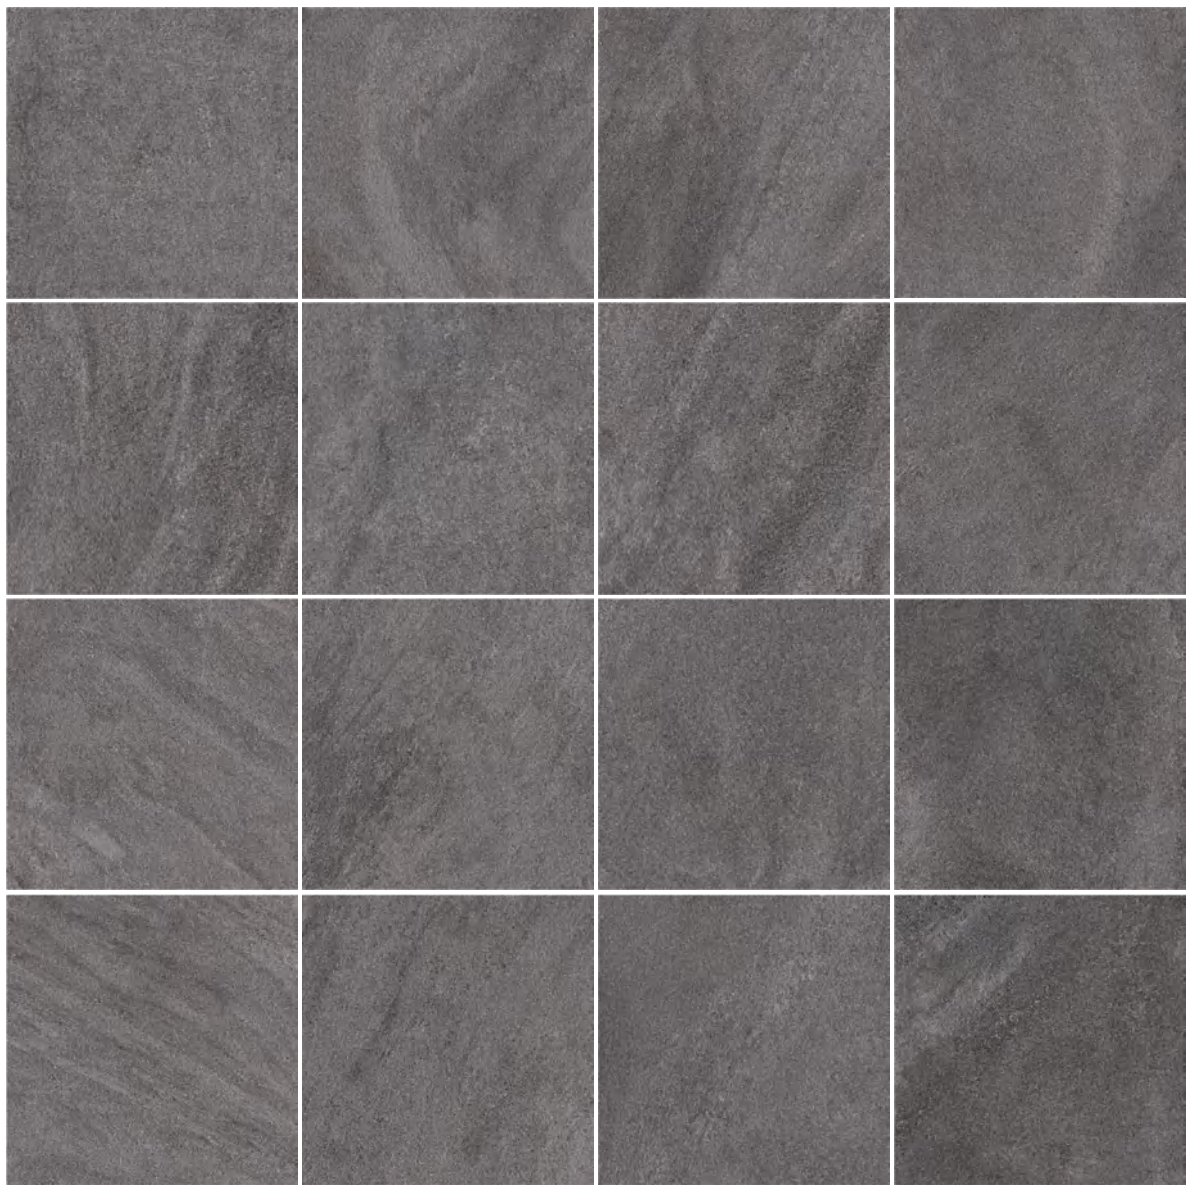


K00606100ZAO 600×600×20mm  16



K00606097ZAO 600×600×20mm  16 K00606098ZAO 600×600×20mm  16 K00606099ZAO 600×600×20mm  16

# Sand Stone

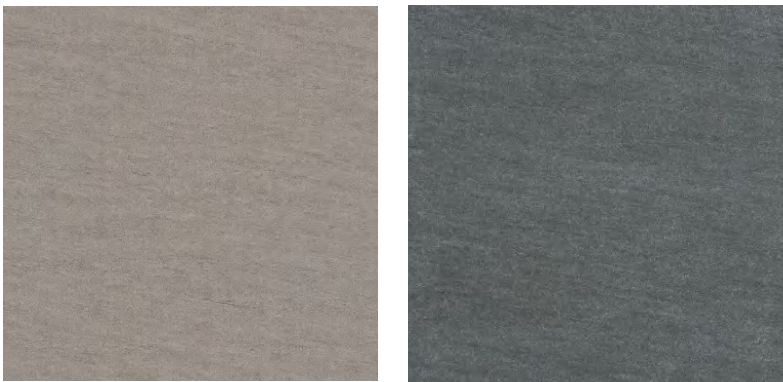

K0606527DAZ 600×600×20mm  5 K0606528DAZ 600×600×20mm  1

# Cement



K0603704DAZ 600×600×20mm  6

\*K01263704ZAO 600×1200×20mm  3



K0606419DAZ 600×600×20mm


 7

# Cararra



\*K0606542DAZ 600×600×20mm  10


# Basalt Stone

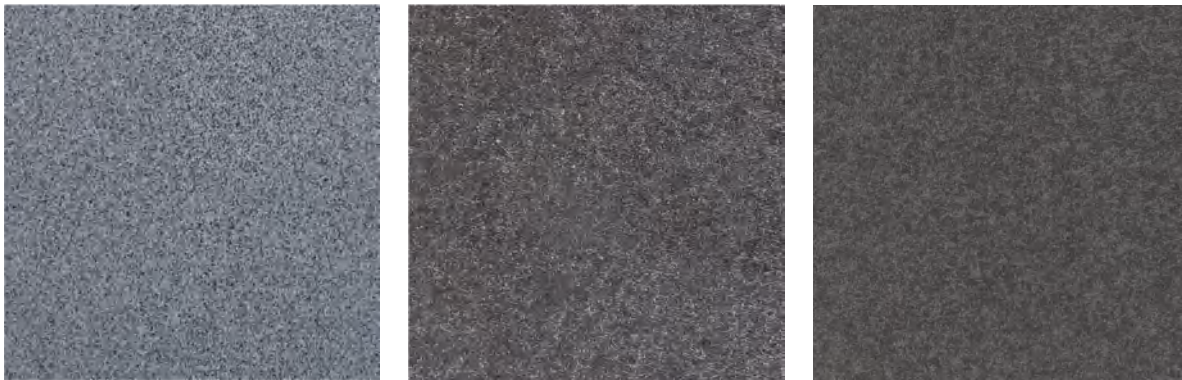

K0606503DAZ 600×600×20mm  1

\*K1266503DAZ 600×1200×20mm  1


K0606033DAZ 600×600×20mm  2

\*K1266033DAZ 600×1200×20mm  2

K0606529DAZ 600×600×20mm  1



# Ivory Wood

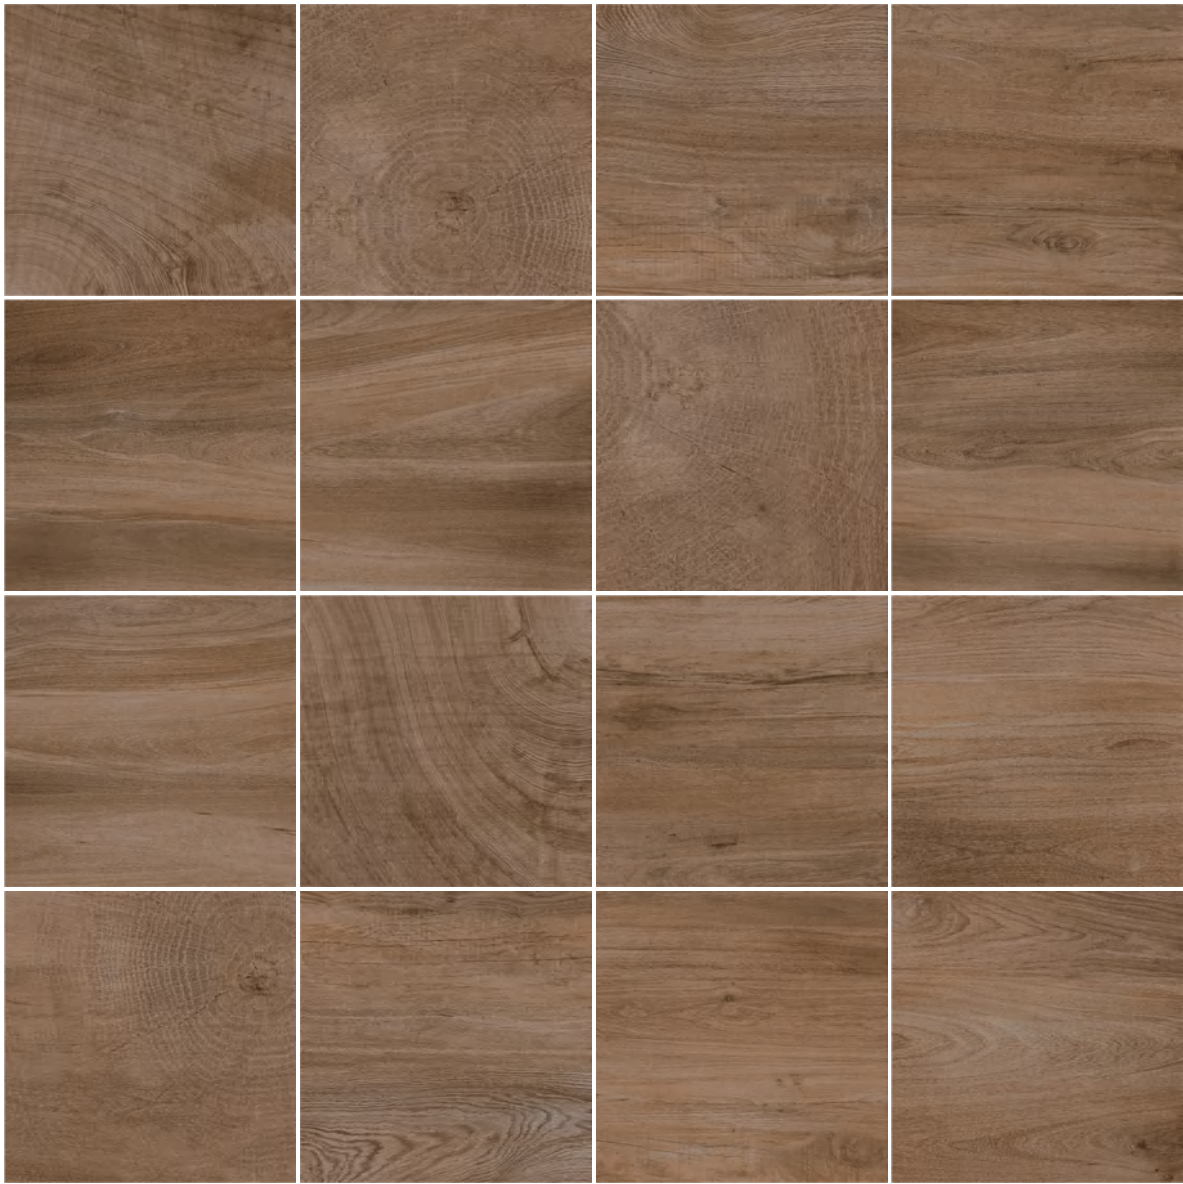


K00606979ZAO 600×600×20mm 16

# Keyword



\* K01268314ZAO 600×1200×20mm 4 K01228314ZAO 1200×200×20mm 12

# Terrazzo

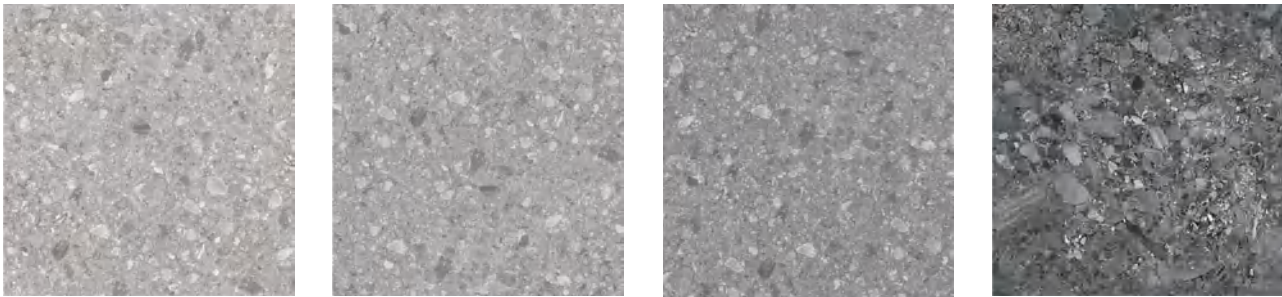

K00606976ZAO 600×600×20mm 6 K00606977ZAO 600×600×20mm 6 K00606978ZAO 600×600×20mm 6 K0606801DAZ 600×600×20mm 4

# Lime Stone



K00606919ZAO 600×600×20mm 7 K00606906ZAO 600×600×20mm 7 K00606893ZAO 600×600×20mm 7 K00606894ZAO 600×600×20mm 7

# Cassero




K0603520DAZ 600×600×20mm 12 K0603522DAZ 600×600×20mm 12 K0603523DAZ 600×600×20mm 12






# ACCESSORIES


Drop Face

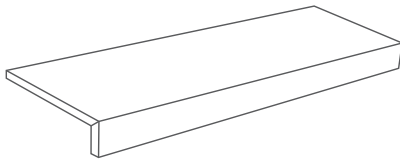


Bullnose

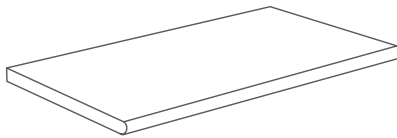


Bullnose  
Build Up 20mm

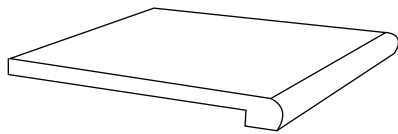


Sink Tile A










Sink Tile B



Swimming Pool Deck Tile




## TECHNICAL DATA


	Thickness	20mm
	Water Absorption	Less than 0.5%
	Breaking Strength	≥10200N
	Modulus of Rupture	Minimum ≥35N/mm <sup>2</sup>
	Static Coefficient of Friction	Dry: 0.87, Wet: 0.73
	PEI	Class 4
	Slipperiness	R11 & P5
	Frost Resistance	No crack or peeling after the frost test

### Steps

Stairs tiles are available:  
Round edge step + riser / 45° chamfering step + riser

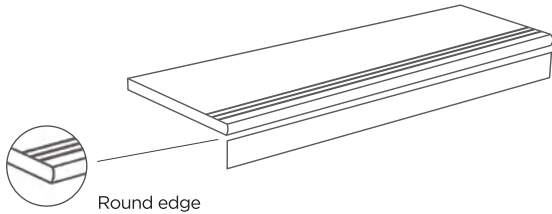


Round edge

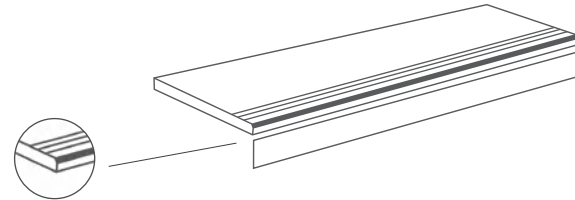





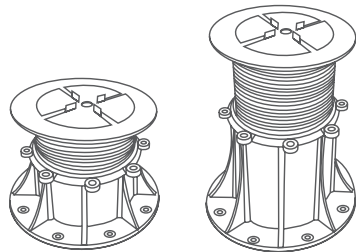






45° chamfering

### Plastic Pedestal





# PACKING INFO

	Ctn Size	600x600x20mm	1200x600x20mm
	Pcs /Ctn	2	1
	M <sup>2</sup> /Ctn	0.72	0.72
	Kgs/Ctn	33.5	34
	Pallet Size	1.1x1.1m	1.24x0.96m
	Ctns/Pat	40	32
	M <sup>2</sup> /Pat	25.92	23
	Kg/Pat	1206	1088
	Ctns/Cont	800	768
	M <sup>2</sup> /Cont	576	552.96
	Kgs/Cont	26800	26112