

# CHAIN HOIST

# SLH-B型手拉葫芦

## SLH-B TYPE CHAIN HOIST

SLH-B手拉葫芦配有防止过载保护的安全装置，确保吊起过重的货物时的使用安全，而且也可以防止葫芦主体受到损坏。该产品一端选用导链板装置，防止链条的扭转。同时增加手链环，用于克服手拉链条易翻转的现象。

适用范围：

主要用于工厂、仓库、码头、矿山等场所，用于起吊小型设备和运送货物。

SLH-B手拉葫芦特点：


1. 双重保护作用的过载安全保护装置；
2. 本机体积小、重量轻、携带方便、操作灵活、安全可靠、经久耐用。

Model: SLH-B

1. One of best selling hoist.
2. Capacity ranges from 0.5t to 20t, heavy duty 30t, 50t is available.
3. Heavy duty and compact design to meet all pertinent work standard.
4. Reliable disc brake, premium grade alloy load chain and zinc plated hand chain as standard.
5. Drop-forged and expertly heat treated hooks for great strength and long wearing.

### TECHNICAL BENEFITS

1. Light weight robust construction;
2. Low effort to lift maximum load;
3. Fully forged hooks;
4. Fully machines lift wheel;
5. ISO high grade alloy chain;
6. Zinc plated hand chain as standard;
7. Double cover protection;
8. Durable baked enamel paint protection;
9. Overload protection device available upon request.

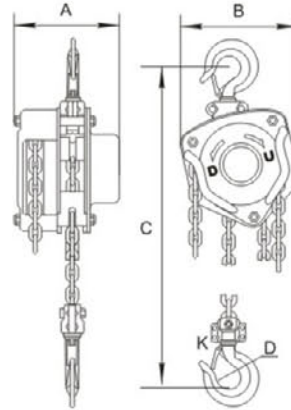

### SLH-B型手拉葫芦参数：

#### SPECIFICATION

型号 Product Code	SLH-B05	SLH-B1	SLH-B1.5	SLH-B2	SLH-B3	SLH-B5	SLH-B10	SLH-B20	SLH-B30	SLH-B50	
额定起重量 Capacity(t)	0.5	1	1.5	2	3	5	10	20	30	50	
起升高度 Standard Lift(m)	2.5	2.5	2.5	3	3	3	3	3	3	3	
试验载荷 Running Testload (kn)	7.5	15	22.5	45	45	62.5	125	250	375	625	
满载时手拉力 Pulling Efforts(n)	200	320	360	365	385	435	443	435x2	435x2	435x2	
起重链条直径x行数 Load chain diameter number of falls(mm)	6.0x1	6.0x1	8.0x1	8.0x1	8.0x2	10.0x2	10.0x4	10.0x8	10.0x12	10.0x22	
起重链条每提升1米手拉链条拉动的距离 The distance of hand chain pulling when lifting height go up one meter (mm)	32	40	72	72	144	158	316	636x2	948x2	1738x2	
净重 Net Weight(kg)	8.4	11	16.2	18.5	25.6	42.8	79.5	193	220	1092	
主要尺寸 Dimensions(mm)	A	131	140	161	161	186	207	215	350	406	
	B	127	158	187	187	210	253	398	680	962	
	C	270	317	399	414	465	636	798	890	2578	
	D	35	40	45	50	58	64	85	110	110	170
	K	30	34	38	41	48	52	64	85	85	130
装箱尺寸 Packing Measurement(cm)	22x15x19.5	23x18x19.5	28x21x24	28x21x24	32x21x26	40x21x21	64x21x21	64x38x64	72x50x68	110x100x130	