


Chain Series

起重链(G80级/G100级)

General Lifting Chain

1. Material: high quality alloy steel.
2. Surface treatment: self-color, polishing, blackened.
3. Painted, plastic coating, hot-dip galvanized, electric galvanized, etc.
4. Manufacture standard: ISO, DIN, BS, JIS, ASTM.
5. Quality grade: G80, G100.
6. Safety factor: min.4
7. Product marking: "TH" or special marking required by client.
8. Non-standard chain according to the clients' requirements.

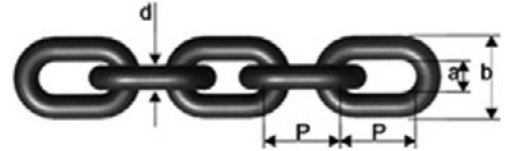

G80 G100 Alloy Steel General Lifting Chain


规格 Size d x p mm	宽度Width(mm)		工作载荷 W.L.L t	实验载荷 Test Load KN	最小破断 Breaking Load min.		重量 Weight kg/m
	最小值 Inside min. a	最大值 Outside max. b			G80	G100	
6x18	7.5	21	1.1	27	45.2	56.2	0.79
7x21	9	24.5	1.5	37	61.6	76.8	1.07
8x24	10	28	2	48	80.4	100	1.38
10x30	12.5	35	3.2	76	125	157	2.2
11x43	12.6	36.5	3.8	92	154	190	2.33
12x36	15	42	4.6	109	181	226	3.1
12.5x38	15.5	42.2	4.9	117	196	245	3.3
13x39	16.3	46	5	128	214	265	3.8
14x42	18	49	6.3	150	250	307	4.13
14x50	17	48	6.3	150	250	307	4
15x46	20	52	7	168	280	353	5.17
16x48	20	56	8	192	320	400	5.63
16x49	24.5	59.5	8	192	320	400	5.71
16x64	23.9	58.9	8	192	320	400	5.11
18x54	23	63	10	246	410	510	6.85
18x64	21	60	10	246	410	510	6.6
19x57	23.7	63.2	11.3	270	450	560	7.7
20x60	25	70	12.5	300	450	628	8.6
22x65	28	74.2	15.3	366	610	760	10.7
22x66	28	77	15.3	366	610	760	10.2
22x86	26	74	15.3	366	610	760	9.5
24x72	32	82	18	432	720	904	12.78
24x86	28	79	18	432	720	904	11.6
26x78	35	91	21.3	510	850	1060	14.87
26x92	30	86	21.3	510	850	1060	13.7
30x90	38	105	28.3	678	1130	1413	19.6
30x108	34	98	28.3	678	1130	1413	18
32x96	40	106	32.2	772	1286	1607	22.29
34x126	38	109	36.3	870	1450	1814	22.7
34x102	46.5	128.5	36.3	870	1450	1814	25.5

Chain Series

起重链

Lifting Chain

1. Material: high quality alloy steel.
2. Surface treatment: self-color, polishing, blackened, Painted, plastic coating, hot-dip galvanized, electric galvanized, etc.
3. Manufacture standard: ISO, DIN, BS, JIS, ASTM.
4. Quality grade: G80, G100.

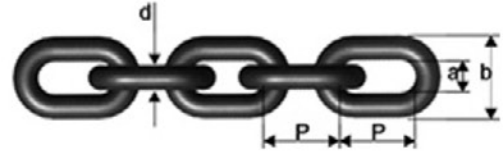

EN818-2 Lifting Chain

规格 Size d x p mm	宽度Width(mm)		工作载荷 W.L.L t	实验载荷 Test Load KN	最小破断 Breaking Load min.		重量 Weight kg/m
	最小值 Inside min.	最大值 Outside max.			G80	G100	
	a	b			KN		
6x18	7.5	22.2	1.12	28.3	45.2	56.5	0.80
7x21	9.5	25.9	1.50	38.5	61.6	76.9	1.10
8x24	10.4	29.6	2.00	50.3	80.4	100	1.40
10x30	13	37	3.15	78.5	126	157	2.20
13x39	16.9	48.5	5.3	133	212	265	3.80
16x48	20.8	59.2	8.00	201	322	402	5.70
19x57	24.7	70.3	11.20	284	454	566	8.00
22x66	28.6	81.4	15.00	380	608	760	10.80
26x78	33.8	96.2	21.20	531	849	1060	15.20
32x96	41.6	118	31.50	804	1280	1607	23.00

