

Ratchet Tie Downs

KBS型捆绑带

Ratchet Strap

捆绑带又称货物捆扎带、捆绑器、紧固器，是应用在货物的运输、移动装运或仓储时起固定作用的。由强力化工纤维带和拉紧器两部分组成。

KBS捆绑带使用高强涤纶丝制作，吸水性低，适应自然环境强。

适用范围：

适合在运输各种物品中以专业工具使用，也可作为物流、军队运输、火车运输时捆绑货物之用。

KBS型捆绑带特点：

- 1、省时省力：一人操作即可使捆绑带产生巨大的捆绑力，绑卸快速。
- 2、安全耐用：产品采用特殊钢材为机件、强力耐酸碱纤维材质组合而成，安全可靠、经久耐用。
- 3、操作简易：瞬间绑紧，绝不脱落；瞬间松绑，操作简便；回收绑索容易，不占空间。
- 4、不伤货物：产品采用纤维材质扁平织带组合而成，受力点分散、柔软、绝不伤货物。

Tie Down Straps can also be called lashing straps, ratchet straps, or tie downs. They can be used in a number of different applications, but they are mainly used for securing cargo on flatbed trailers, moving trucks, pickup trucks, and other types of trailers. There are two main types of Tie Down Straps, one piece and two piece. One piece straps are also called Endless Loop Straps and function just like a belt does by going around the object and coming back to itself to tighten. A two piece strap attaches each end to something else before tightening. Custom Rubber Handle Ratchet Strap with Wire Hooks High-Quality, Dependable Ratchet Straps - In Stock or Custom Order - Ships Fast! High quality ratchet straps made to order from China factory. 1, 2, 3, or 4-inch webbing.

Model: KBS



KBS型捆绑带参数： SPECIFICATION

产品编号 ART NUMBER	带宽 WIDTH (mm)	额定载重 W.L.L.		最小破短强度 Min. Breaking Strength		带长 Length (m)		净重 N.W. (kg)	装箱数量 Sets Per Carton	装箱尺寸 Dimension of Carton(cm)
		kg	lbs	kg	lbs	Fixed end	Loose end			
KBS015	25	150	330	450	990	0.5	2.5	0.38	90	49x30x29
KBS200	25	200	440	600	1320	0.5	2.5	0.40	85	49x30x29
KBS250	25	250	550	800	1650	0.5	2.5	0.42	80	49x30x29
KBS300	25	300	660	900	1980	0.5	2.5	0.43	75	49x30x29
KBS350	25	350	770	1000	2310	0.5	4.0	0.50	60	49x30x29
KBS500	38	500	1100	1500	3300	0.5	4.0	0.80	25	49x30x29
KBS650	38	650	1430	2000	4290	0.5	5.5	1.10	20	49x30x29
KBS800	38	800	1750	2500	5250	0.5	5.5	1.30	20	49x30x29
KBS1000	50	1000	2200	3000	6600	0.5	7.5	2.00	12	49x30x29
KBS1150	50	1150	2500	3500	7500	0.5	7.5	2.20	12	49x30x29
KBS1350	50	1350	3000	4000	9000	0.5	7.5	2.40	12	49x30x29
KBS1500	50	1500	3300	4500	9900	0.5	7.5	2.50	12	49x30x29
KBS1650	50	1650	3600	5000	10800	0.5	7.5	2.60	12	49x30x29
KBS2250	75	2250	5000	6800	15000	0.5	8.5	5.10	3	49x30x29
KBS2650	75	2650	5800	8000	17400	0.5	8.5	6.30	3	49x30x29
KBS2250B	100	2250	5000	6800	15000	0.5	9.5	5.80	3	49x30x29
KBS2650B	100	2650	5800	8000	17400	0.5	9.5	7.00	3	49x30x29
KBS3360	100	3360	7350	10000	22050	0.5	9.5	8.80	3	49x30x29

Ratchet Tie Downs

Product Belt for cargo lashing

Technical Specifications


1. Any color depending order's request.
2. Only for cargo lashing. Not designed for overhead lifting or towing.
3. Min. Breaking strength (M.B.S) Stripes: each stripe is equal to 1 tonne(M.B.S).
4. Please be sure the M.B.S required at the time of order.

Characteristics

*Low elongation.

Norms

*According to Machine Directive 89/392/EC.

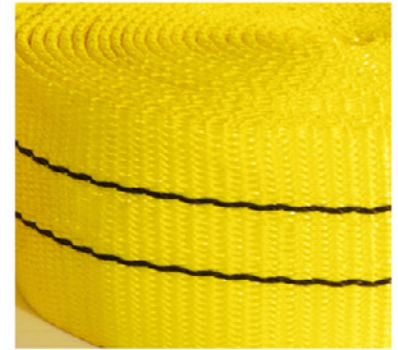

型号 Name	织带宽度 Belt Width (mm)	装配断裂强度 Assembly break strength (kgs)	织带抗拉强度 Webbing tensile strength (kgs)	每200米的净重 N.W of 200m (kgs)	纸箱尺寸 Dimension of Carton (mm)
LBCB2501	25	450	585	3.2	55*40*27
LBCB2502	25	600	750	4.0	
LBCB2503	25	800	1000	4.7	
LBCB2504	25	900	1125	5.3	
LBCB2505	25	1000	1250	5.4	
LBCB3801	38	1500	1875	8.3	
LBCB3802	38	2000	2500	7.3	
LBCB3803	38	2500	3125	14.1	
LBCB5001	50	3000	3750	17.2	
LBCB5002	50	3500	4375	19.8	
LBCB5003	50	4000	5000	21.4	
LBCB5004	50	4500	5625	23.6	
LBCB5005	50	5000	6250	26	
LBCB7501	75	6800	8500	35.5	
LBCB7502	75	8000	10000	42.0	
LBCB10001	100	6800	8500	35.5	
LBCB10002	100	8000	10000	42.0	
LBCB10003	100	10000	12500	52.6	