

## FOUR POST PARKING LIFTS


The ultimate fusion of engineering and performance, AMGO leads the way in innovation with our commercial-grade parking lift solutions. Combining robust construction with exclusive patented technologies, including the patented concealed lock control system, these lifts maximize space efficiency and provide unrivalled parking convenience with enhanced stability, durability and reliability.



**A430-P/A430-HP**  
**A435-P/A440-HP**

## FOUR POST LIFT


### SPECIFICATIONS

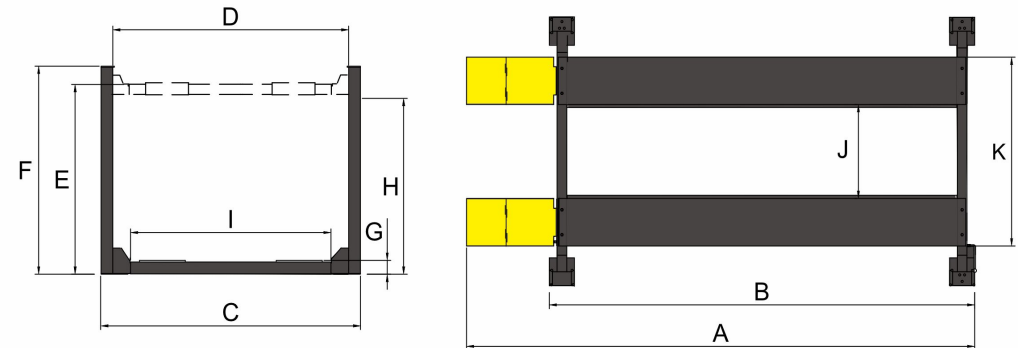

Model		A430-P	A430-HP	A435-P	A440-HP
Lifting capacity		3000kg	3000kg	3500kg	4000kg
lifting time		31S	37S	40S	57S
Overall Length ( Inc Ramps)	A	4720mm	5008mm	5265mm	6049mm
Outside edge of crossbeams	B	3877mm	4165mm	4415mm	5199mm
Overall Width	C	2409mm	2409mm	2604mm	2777mm
Width Between Posts	D	2167mm	2167mm	2358mm	2531mm
Max. Lifting Height	E	1860mm	2190mm	1875mm	2226mm
Max. Locking Height		1780mm	2110mm	1795mm	2146mm
Overall Height	F	2105mm	2455mm	2105mm	2455mm
Minimum Height	G	120mm	120mm	140mm	156mm
Max. Underneath Height	H	1760mm	2090mm	1755mm	2096mm
Max. Lock Underneath runway		1680mm	2010mm	1675mm	2016mm
Drive-Thru Clearance	I	1956mm	1956mm	2074mm	2247mm
Width Between Runways	J	940mm	940mm	940mm	1077mm
Outside Edge of Runways	K	1890mm	1890mm	1890mm	2093mm
Motor		3.0HP	3.0HP	3.0HP	3.0HP
Gross Weight		654kg	690kg	713kg	881kg



EXCLUSIVE FEATURE  
Double-S shape column

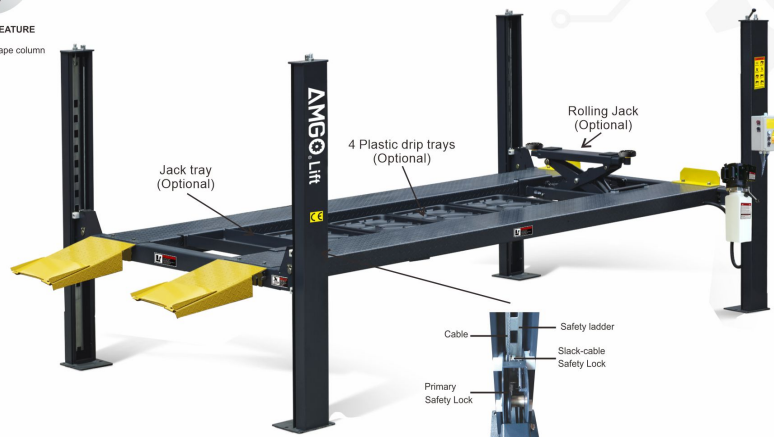

**A430-P A430-HP**  
(3000KG) (3000KG)

## FEATURES

- Commercial grade, with CE certification;
- AMGO patented concealed safety lock control with single-point manual release;
- Double-S shaped columns for enhanced strength;
- Dual safety devices mechanisms: both primary safety locks and cable-slack protection;
- Integrated non-skid diamond platforms;
- Foldable drive-on ramps;
- Power side column can be installed at any corner;
- High quality hydraulic cylinder design and manufactured at high standard.

FOUR POST LIFT




**A435-P A440-HP**  
(3500KG) (4000KG)



Patented concealed safety lock control device with single-point manual lock release.  
Patent No.: ZL 2023 2 3215814.0



Optional caster kits.  
Kits No. 40801.



Optional extended aluminum alloy drive-in ramps.  
Kits No: 40814(A430-P, A430-HP)  
Kits No: 40815(A435-P, A440-HP)



Optional plastic oil tray (1 set, 4pcs)  
Kits No. 40806 for A430-P, A430-HP, A435-P;  
Kits No. 40807 for A440-HP.



Optional Jack tray Kit No.: 40809



Optional Motor protect cover for outdoor installation Kits No.: 40810.  
with emergency stop switch.



Optional rubber wheel chock.  
P/N: 40811.



Optional storage wave panels  
Kits No. 40812



Optional J5H sliding jack with hand pump, 2.5" extension adapters included. Capacity 2200kg